

## PATENT COOPERATION TREATY

PCT

## NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Commissioner  
 US Department of Commerce  
 United States Patent and Trademark  
 Office, PCT  
 2011 South Clark Place Room  
 CP2/5C24  
 Arlington, VA 22202  
 ETATS-UNIS D'AMERIQUE  
 in its capacity as elected Office

Date of mailing (day/month/year)

02 November 2000 (02.11.00)

International application No.

PCT/AU00/00280

Applicant's or agent's file reference

89603

International filing date (day/month/year)

31 March 2000 (31.03.00)

Priority date (day/month/year)

31 March 1999 (31.03.99)

Applicant

BOYD, Michael, David et al

1. The designated Office is hereby notified of its election made:



in the demand filed with the International Preliminary Examining Authority on:

04 October 2000 (04.10.00)



in a notice effecting later election filed with the International Bureau on:

2. The election ☒ was

was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO  
 34, chemin des Colombettes  
 1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

F. Baechler

Telephone No.: (41-22) 338.83.38

## PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING  
OF A CHANGE(PCT Rule 92bis.1 and  
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

F B RICE & CO  
605 Darling Street  
Balmain, NSW 2041  
AUSTRALIE

Date of mailing (day/month/year) 02 November 2000 (02.11.00)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference 89603	
International application No. PCT/AU00/00280	International filing date (day/month/year) 31 March 2000 (31.03.00)

## 1. The following indications appeared on record concerning:

☒ the applicant    ☐ the inventor    ☐ the agent    ☐ the common representative

Name and Address CABSCAPE HOLDINGS PTY LTD Suite G3 63 Stead Street South Melbourne, VIC 3205 Australia	State of Nationality AU	State of Residence AU
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

## 2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☐ the person    ☐ the name    ☒ the address    ☐ the nationality    ☐ the residence

Name and Address CABSCAPE HOLDINGS PTY LTD 80 Maribyrnong Street Footscray, VIC 3011 Australia	State of Nationality AU	State of Residence AU
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	

## 3. Further observations, if necessary:

## 4. A copy of this notification has been sent to:

<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned
<input checked="" type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland  Facsimile No.: (41-22) 740.14.35	Authorized officer  F. Baechler  Telephone No.: (41-22) 338.83.38
---	---

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU00/00280

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>												
Int. Cl. <sup>7</sup> : E04F 19/08, E04B 5/08, E06B 5/01, H02G 3/08												
According to International Patent Classification (IPC) or to both national classification and IPC												
<b>B. FIELDS SEARCHED</b>												
Minimum documentation searched (classification system followed by classification symbols) E04F 19/08, 15/024, E04B 5/48, E06B 1/-, 3/-, 5/-, 7/-, H02G 3/-												
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched AU: IPC as above												
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) DERWENT + keywords												
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>												
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.										
X	US 4721476 A (Zeliff et al) 26 January 1988	1,20										
X	US 5008491 A (Bowman) 16 April 1991	12										
X	WO 98/34310 A1 (Albert Ackermann Gmbh + Co) 6 August 1998	12										
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex												
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A" document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E" earlier application or patent but published on or after the international filing date</td> <td>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O" document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;" document member of the same patent family</td> </tr> <tr> <td>"P" document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family	"P" document published prior to the international filing date but later than the priority date claimed	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention											
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone											
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art											
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family											
"P" document published prior to the international filing date but later than the priority date claimed												
Date of the actual completion of the international search 5 June 2000		Date of mailing of the international search report 19 JUN 2000										
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929		Authorized officer  Telephone No : (02) 6283 2113										

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00280

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SE 469706B (Thorsman & Co) 23 August 1993	20,21,31,37
X	DE 4003279 A (Kleinhuis H & Co) 8 August 1991	24,31,37
X	US 4973797 A (Jorgensen et al) 27 November 1990	24,31,39
X	US 4850176 A (Munsey et al) 25 July 1989	30
X	GB 2282921 A (Davis Group Ltd) 19 April 1995	30
X	Patent Abstracts of Japan 10248146 A (Om Kiki KK) 14 September 1998	30
A	WO 93/00732 A1 (MK Electric Ltd) 7 January 1993	all

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU00/00280**Box I** Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a)

**Box II** Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

( See extra sheet for details )

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest**

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00280

**Supplemental Box**

(To be used when the space in any of Boxes I to VIII is not sufficient)

**Continuation of Box No: II**

The international application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept. In coming to this conclusion the International Searching Authority has found that there are different inventions as follows:

1. Claims 1,4,5 and 12 are directed to a floor frame for an access hatch with a flange which is under the floor covering or tapered. It is considered that the thus produced low profile frame comprises a first "special technical feature".
2. Claims 20,21,22,34 and 39 are directed to a lid for an access panel with a pivoted hatch in the lid. It is considered that this comprises a second "special technical feature".
3. Claim 30 is directed to a lid and frame for an access panel with chamfered edges forming a watertight seal. It is considered that this comprises a third "special technical feature".
4. Claim 31 is directed to a frame for an access panel with an aperture and a well or trough along one side. It is considered that this comprises a fourth "special technical feature".
5. Claim 37 is directed to a lid for an access panel with a bistable latch. It is considered that this comprises a fifth "special technical feature".

Since the abovementioned groups of claims do not share any of the technical features identified, a "technical relationship" between the inventions, as defined in PCT rule 13.2 does not exist. Accordingly the international application does not relate to one invention or to a single inventive concept, a priori.

Furthermore, the claims of claim groups 1 and 2 are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these claims is a low profile access panel and an access panel with hatches in its lid respectively. However these concepts are not novel in the light of. Therefore these claims lack unity a posteriori.

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

International application No.  
**PCT/AU00/00280**

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member			
US	4721476	NONE				
US	5008491	US	4967041			
WO	9834310	AU	59879/98	CN	1216169	EP 894352
DE	4003279	EP	440972			
US	4973797	CA	2005775			
US	4850176	AU	26491/88	CA	1311103	JP 1203560
		US	5111630			
GB	2282921	NONE				
END OF ANNEX						

REC'D 13 JUL 2001

W/O PCT

Applicant's or agent's file reference 89603	<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416).
International Application No. <b>PCT/AU00/00280</b>	International Filing Date ( <i>day/month/year</i> ) 31 March 2000	Priority Date ( <i>day/month/year</i> ) 31 March 1999
International Patent Classification (IPC) or national classification and IPC  Int. Cl. <sup>7</sup> E04F 19/08, E04B 5/08, E06B 5/01, H02G 3/08		
Applicant  CABSCAPE HOLDINGS PTY LTD et al		

1.	This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.																								
2.	This REPORT consists of a total of 4 sheets, including this cover sheet.  <input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).  These annexes consist of a total of 5 sheet(s).																								
3.	This report contains indications relating to the following items:  <table style="width: 100%;"> <tr> <td style="width: 5%;">I</td> <td style="width: 5%;"><input checked="" type="checkbox"/></td> <td style="width: 90%;">Basis of the report</td> </tr> <tr> <td>II</td> <td><input type="checkbox"/></td> <td>Priority</td> </tr> <tr> <td>III</td> <td><input type="checkbox"/></td> <td>Non-establishment of opinion with regard to novelty, inventive step and industrial applicability</td> </tr> <tr> <td>IV</td> <td><input checked="" type="checkbox"/></td> <td>Lack of unity of invention</td> </tr> <tr> <td>V</td> <td><input checked="" type="checkbox"/></td> <td>Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement</td> </tr> <tr> <td>VI</td> <td><input type="checkbox"/></td> <td>Certain documents cited</td> </tr> <tr> <td>VII</td> <td><input type="checkbox"/></td> <td>Certain defects in the international application</td> </tr> <tr> <td>VIII</td> <td><input type="checkbox"/></td> <td>Certain observations on the international application</td> </tr> </table>	I	<input checked="" type="checkbox"/>	Basis of the report	II	<input type="checkbox"/>	Priority	III	<input type="checkbox"/>	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability	IV	<input checked="" type="checkbox"/>	Lack of unity of invention	V	<input checked="" type="checkbox"/>	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement	VI	<input type="checkbox"/>	Certain documents cited	VII	<input type="checkbox"/>	Certain defects in the international application	VIII	<input type="checkbox"/>	Certain observations on the international application
I	<input checked="" type="checkbox"/>	Basis of the report																							
II	<input type="checkbox"/>	Priority																							
III	<input type="checkbox"/>	Non-establishment of opinion with regard to novelty, inventive step and industrial applicability																							
IV	<input checked="" type="checkbox"/>	Lack of unity of invention																							
V	<input checked="" type="checkbox"/>	Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement																							
VI	<input type="checkbox"/>	Certain documents cited																							
VII	<input type="checkbox"/>	Certain defects in the international application																							
VIII	<input type="checkbox"/>	Certain observations on the international application																							

Date of submission of the demand 4 October 2000	Date of completion of the report 4 July 2001
Name and mailing address of the IPEA/AU  AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No. (02) 6285 3929	Authorized Officer    <b>JON MILLS</b> Telephone No. (02) 6283 2113

**I. Basis of the report**

1. With regard to the **elements of the international application**:\*
- ☐ the international application as originally filed.
- ☒ the description, pages **1-18**, as originally filed,  
pages , filed with the demand,  
pages , received on with the letter of
- ☒ the claims, pages , as originally filed,  
pages , as amended (together with any statement) under Article 19,  
pages , filed with the demand,  
pages **19-23**, received on **29 June 2001** with the letter of **29 June 2001**
- ☒ the drawings, pages **1-9**, as originally filed,  
pages , filed with the demand,  
pages , received on with the letter of
- ☐ the sequence listing part of the description:  
pages , as originally filed  
pages , filed with the demand  
pages , received on with the letter of
2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.  
These elements were available or furnished to this Authority in the following language which is:
- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).
3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international preliminary examination was carried out on the basis of the sequence listing:
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished
4. ☐ The amendments have resulted in the cancellation of:
- ☐ the description, pages
- ☐ the claims, Nos.
- ☐ the drawings, sheets/fig.
5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report

**IV. Lack of unity of invention**

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
- ☐ paid additional fees.
- ☐ paid additional fees under protest.
- ☐ neither restricted nor paid additional fees.

2. ☒ This Authority found that the requirement of unity of invention is not complied with and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.
- ☒ not complied with for the following reasons:

This Authority found multiple inventions as follows:

1. Claims 1,4 and 5 are directed to a floor frame for an access hatch with a flange which is under the floor covering or tapered. It is considered that the thus produced low profile frame comprises a first "special technical feature".
2. Claims 19,20,21,31 and 36 are directed to a lid and frame for an access panel with a pivoted hatch in the lid. It is considered that this comprises a second "special technical feature".
3. Claims 23 is directed to a lid and frame for an access panel with an open hinge and detent means on the lid. It is considered that this comprises a third "special technical feature".
4. Claim 29 is directed to a lid and frame for an access panel with chamfered edges forming a watertight seal. It is considered that this comprises a fourth "special technical feature".
5. Claim 30 is directed to a frame for an access panel with an aperture and a well or trough around its periphery. It is considered that this comprises a fifth "special technical feature".
6. Claim 34 is directed to a lid for an access panel with a bistable latch. It is considered that this comprises a sixth "special technical feature".

Since the abovementioned groups of claims do not share any of the technical features identified, a "technical relationship" between the inventions, as defined in PCT rule 13.2 does not exist. Accordingly the international application does not relate to one invention or to a single inventive concept, a priori.

Furthermore, the claims of groups 1 and 2 are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these groups of claims is a low profile access hatch and an access panel with hatches in its lid respectively. However this concept is not novel in the light of many of the citations. Therefore these claims lack

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

- ☒ all parts.
- ☐ the parts relating to claims Nos.

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement**

**1. Statement**

Novelty (N)	Claims 1-36	YES
	Claims	NO
Inventive step (IS)	Claims 1-36	YES
	Claims	NO
Industrial applicability (IA)	Claims 1-36	YES
	Claims	NO

**2. Citations and explanations (Rule 70.7)**

No citation or obvious combination of citations disclose the features of the claims which are thus novel and inventive.

**CLAIMS**

1. A floor having a floor covering and an opening in the floor, an access panel for access to cables, services or the like through the opening, the access panel including a floor frame located in the opening, a lid supported on the frame, the frame having a support flange extending around its periphery wherein the support flange extends between the floor covering and the floor.
2. A floor as claimed in claim 1 wherein the flange provides a ramped edge.
3. A floor as claimed in claim 1 wherein the flange is formed in two abutting parts from different materials.
4. A frame for an access panel comprising a rigid structural element for supporting an outlet box or the like, the frame including a tapered outer edge or flange wherein the flange tapers substantially uniformly over a distance of at least 10, and preferably, 20 times the maximum thickness of the flange.
5. A frame for an access panel comprising:-
  - a rigid structural frame, defining an outer edge; and
  - a tapered flange formed from a soft non structural material, typically a flexible polymeric material, abutting the outer edge.
6. A frame as claimed in claim 5 wherein the flexible polymeric material is attached to and overlying the outer edge.
7. A frame as claimed in claim 6 wherein the flexible polymeric material is separate from the outer edge and defines a step portion arranged to mate with a corresponding recess on the outer edge.
8. A frame as claimed in claim 76 wherein the structural part of the frame is formed from a rigid high strength material.
9. A frame as claimed in claim 8 wherein the high strength material is either an engineering grade plastic or a metal.
10. A frame as claimed in claim 8 wherein the high strength material is a die cast metal, such as zinc or aluminium.
11. A frame as claimed in any one of claims 5 to 10 wherein the flexible polymeric material is eva, rubber modified polypropylene, or polyurethane.
12. A frame as claimed in any one of claims 4 to 11 wherein the frame defines an upstanding rib which extends around a central aperture of the frame, which aperture is closable by a lid, the rib being disposed between the peripheral edge of the flange and the central aperture, and wherein the upstanding rib does not project above, and are preferably below, the load

bearing surface of the floor, the load bearing surface being the surface down to which the pile of the carpet of the floor crushes under normal usage loads.

13. A floor incorporating a frame as claimed in any one of claims 4 to 11 wherein the materials and construction of the frame and lid are such that the load bearing capacity of the frame and lid is substantially the same as that of the surrounding floor.

14. A frame as claimed in claim 12 or 13 wherein the lid comprises a rigid structural panel having a flexible overmoulding.

15. A frame as claimed in claim 14 wherein the rigid panel is a steel plate, a die casting or an injection moulded polymer.

16. A frame as claimed in claim 14 or 15 wherein the flexible overmoulding is polyurethane or a rubber modified polypropylene.

17. A frame as claimed in any one of claims 4 to 16 wherein the frame is rectangular and defines a pivot surface extending parallel to and spaced inwardly from an inner edge of the frame which inner edge abuts the floor deck and defines the aperture.

18. A frame as claimed in claim 17 wherein the underside of the lid defines a bearing surface which is adapted to slidably engage on the pivot surface to allow the lid to bear on and pivot about the pivot surface.

19. An access panel for insertion into an aperture in a floor, wall, desktop or like barrier, the access panel including:

a frame adapted to be connected in the aperture in the barrier,

a lid positioned within the frame and pivotably movable relative to the frame between a lid open position and a lid closed position,

a hatch pivotably connected to the lid and movable between a hatch open position in which there is an opening in the lid through which cable services may extend and a hatch closed position in which there is no such opening,

the access panel being characterised in that locking means are provided between the hatch and the frame such that when the lid is in the lid closed position the hatch will be locked against movement between the hatch open position and the hatch closed position irrespective of which of those positions it is in initially.

20. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with an opening therethrough, the lid

including a hatch pivotally connected to the lid and moveable between an open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no such aperture characterised in that when the lid is latched and the hatch is open, neither  
5 the lid or the hatch can be raised from a predetermined position by movement of cable.

21. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with a hole therethrough, the lid comprising a  
10 rigid panel formed from a structural material, such as metal or engineering grade polymer and an overmoulding formed from a flexible polymeric material, the overmoulding defining at least one hatch.

22. A lid for an outlet for cable services as claimed in claim 21 wherein the lid and hatch are joined together by an integral hinge.

23. An access panel for accessing cable surfaces through a barrier such as a floor, wall or the like, the access panel having a frame and a lid wherein the frame defines a first convex arcuate bearing surface which is shaped and configured so as to define, in use, an upwardly projecting hinge surface supported away from a wall of the frame and wherein the lid defines a  
20 second concave bearing surface which is correspondingly arcuate, the lid being provided with detent means adjacent the second bearing surface, the first and second bearing surfaces being shaped and configured such that in use the second bearing surface is arranged to bear on the first bearing surface to form an open hinge element, relative movement of the second bearing  
25 surface about the first bearing surface allowing the lid to rotate relative to the frame, characterised in that when the lid is open, the open hinge geometry allows the lid to be freely lifted off the frame and in that when the lid is closed the detents engage underneath the frame providing the first bearing surface and prevent the one end of the lid adjacent that bearing surface from  
30 being raised vertically upwardly relative to the frame

24. An access panel as claimed in claim 23 wherein a further second bearing surface is defined at an opposite end of the frame and a latch on the lid is engageable underneath the second bearing surface.

25. An access panel as claimed in claim 24 wherein the latch includes one  
35 or more C-shaped projections which engage underneath the second bearing

surface, the geometry of the arrangement being such that pressure on the underside of the lid tends to force the latch to close more tightly.

26. An access panel as claimed in claim 24 or 25 wherein the bearing elements are symmetrically arranged such that the lid can be turned around  
5 by 180° with either bearing element acting as the fulcrum for the hinge.

27. An access panel as claimed in claim 26 wherein two further bearing elements are provided.

28. An access panel as claimed in any one of claims 23 to 27 characterised in that a closed channel is formed extending along and around one or more  
10 inner edges of the frame.

29. An access panel for insertion into an aperture in a floor, wall or the like, wherein the frame defines an aperture around which an upstanding rib extends, wherein the edges of the rib are chamfered and wherein the edges of the lid for the access panel are formed from a flexible material and are also  
15 chamfered to provide a substantially waterproof sealing fit between the lid and the upstanding rib.

30. An access panel for insertion into an aperture in a floor, desktop or the like, the access panel including a floor frame defining a square or rectangular aperture and wherein a closed well or trough is defined extending  
20 continuously along the four sides of the aperture.

31. An access panel for cable services or the like comprising:

a frame;

a lid adapted to close the frame;

the lid including a latch pivotally connected to the lid, a hatch  
25 movable between an open position in which there is an aperture in the lid for which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that the latch is supported in the open position between two or more pillars which have curved inner faces so as to define an expanding trumpet-shaped aperture for cables extending through  
30 the hatch and outside of the panel.

32. An access panel as claimed in claim 31 wherein the sides of the lid of the lid are tapered inwards to facilitate closure against the carpet frame and also to sweep aside the carpet.

33. An access panel as claimed in claim 32 wherein the edge of the lid has  
35 a slope of 30 to 45 degrees.

34. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated in a frame located in the outlet and adapted to be moved between a lid open position and a lid closed position, the lid including a latch for locking the lid in the lid closed position within  
5 the frame, wherein the latch is moveable between, and is stable in each of, a latch open position and a latch closed position, the latch defining a contact surface which, as the lid is moved towards the lid closed position contacts the frame to initially pivot the latch towards the latch open position and to subsequently, as the lid is moved further towards the lid closed position,  
10 pivot the latch towards the latch closed position to effect the locking of the lid in the lid closed position.
35. A lid as claimed in claim 34 wherein the contact surface of the latch includes a lead in surface which is angled to push the latch inwards on contact with the frame and a second upper surface which is generally parallel  
15 to the side of the frame.
36. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of a barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering  
20 grade polymer and a hatch which is mounted to the lid in such a manner that the hinge is pivotable about an axis which is located outside of the plane of the lid and on a side thereof which, in use, is distal to the surface of the barrier and wherein the pivot axis is located above the load bearing surface of the lid.

**CLAIMS**

1. A floor having a floor covering and an opening in the floor, an access panel for access to cables, services or the like through the opening, the access panel including a floor frame located in the opening, a lid supported on the frame, the frame having a support flange extending around its periphery  
5 wherein the support flange extends between the floor covering and the floor.
2. A floor as claimed in claim 1 wherein the flange provides a ramped edge.
3. A floor as claimed in claim 1 wherein the flange is formed in two  
10 abutting parts from different materials.
4. A frame for an access panel comprising a rigid structural element for supporting an outlet box or the like, the frame including a tapered outer edge or flange wherein the flange tapers substantially uniformly over a distance of at least 10, and preferably, 20 times the maximum thickness of the flange.
- 15 5. A frame for an access panel comprising:-  
a rigid structural frame, defining an outer edge; and  
a tapered flange formed from a soft non structural material, typically a flexible polymeric material, abutting the outer edge.
6. A frame as claimed in claim 5 wherein the flexible polymeric material  
20 is attached to and overlying the outer edge.
7. A frame as claimed in claim 6 wherein the flexible polymeric material is separate from the outer edge and defines a step portion arranged to mate with a corresponding recess on the outer edge.
8. A frame as claimed in claim 7 wherein the structural part of the frame  
25 is formed from a rigid high strength material.
9. A frame as claimed in claim 8 wherein the high strength material is either an engineering grade plastic or a metal.
10. A frame as claimed in claim 8 wherein the high strength material is a die cast metal, such as zinc or aluminium.
- 30 11. A frame as claimed in any one of claims 5 to 10 wherein the flexible polymeric material is eva, rubber modified polypropylene, or polyurethane.
12. A floor having a floor covering, a floor frame for an access panel having a support flange extending around the periphery of the frame and a lid supported on the frame wherein the highest part of the frame and lid do not  
35 project above, and are preferably below the floor covering surface.

13. A frame as claimed in any one of claims 4 to 11 wherein the frame defines an upstanding rib which extends around a central aperture of the frame, which aperture is closable by a lid, the rib being disposed between the peripheral edge of the flange and the central aperture, and wherein the upstanding rib does not project above, and are preferably below, the load bearing surface of the floor, the load bearing surface being the surface down to which the pile of the carpet of the floor crushes under normal usage loads.

14. A floor incorporating a frame as claimed in any one of claims 4 to 11 wherein the materials and construction of the frame and lid are such that the load bearing capacity of the frame and lid is substantially the same as that of the surrounding floor.

15. A frame as claimed in claim 13 or 14 wherein the lid comprises a rigid structural panel having a flexible overmoulding.

16. A frame as claimed in claim 15 wherein the rigid panel is a steel plate, a die casting or an injection moulded polymer.

17. A frame as claimed in claim 15 or 16 wherein the flexible overmoulding is polyurethane or a rubber modified polypropylene.

18. A frame as claimed in any one of claims 4 to 17 wherein the frame is rectangular and defines a pivot surface extending parallel to and spaced inwardly from an inner edge of the frame which inner edge abuts the floor deck and defines the aperture.

19. A frame as claimed in claim 18 wherein the underside of the lid defines a bearing surface which is adapted to slidably engage on the pivot surface to allow the lid to bear on and pivot about the pivot surface.

20. A lid for an access panel for insertion into an aperture in a floor, wall or desktop or the like for cable services in communication with an opening through the barrier, the lid including a hatch pivotally connected to the lid, and moveable between an open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that locking means are provided between the hatch and the frame to lock the hatch in place in both the open and closed positions.

21. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with an opening therethrough, the lid including a hatch pivotally connected to the lid and moveable between an

open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no such aperture characterised in that when the lid is latched and the hatch is open, neither the lid or the hatch can be raised from a predetermined position by

5 movement of cable.

22. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering  
10 grade polymer and an overmoulding formed from a flexible polymeric material, the overmoulding defining at least one hatch.

23. A lid for an outlet for cable services as claimed in claim 22 wherein the lid and hatch are joined together by an integral hinge.

24. An access panel for accessing cable services through a barrier such as a  
15 floor, wall or the like, the access panel having a frame and a lid and wherein the frame defines first and second bearing surfaces being shaped and configured such that the first bearing surface defines a hinge supported away from a wall of the frame and wherein the lid defines a second bearing or hinge surface whose ends define detents, the first and second bearing  
20 surfaces being shaped and configured such that in use the second bearing surface is arranged to bear on the first bearing surface to form an open hinge element, relative movement of the hinge surface about the bearing surface allowing the lid to rotate, characterised in that when the lid is closed, the detents engage underneath the means providing the bearing surface and  
25 prevent the one end of the lid adjacent the bearing surfaces from being raised relative to the bearing surface.

25. An access panel as claimed in claim 24 wherein a further second bearing surface is defined at an opposite end of the frame and a latch on the lid is engageable underneath the second bearing surface.

30 26. An access panel as claimed in claim 25 wherein the latch includes one or more C-shaped projections which engage underneath the second bearing surface, the geometry of the arrangement being such that pressure on the underside of the lid tends to force the latch to close more tightly.

27. An access panel as claimed in claim 25 or 26 wherein the bearing  
35 elements are symmetrically arranged such that the lid can be turned around by 180° with either bearing element acting as the fulcrum for the hinge.

28. An access panel as claimed in claim 27 wherein two further bearing elements are provided.

29. An access panel as claimed in any one of claims 24 to 28 characterised in that a closed channel is formed extending along and around one or more inner edges of the frame.

30. An access panel for insertion into an aperture in a floor, wall or the like, wherein the frame defines an aperture around which an upstanding rib extends, wherein the edges of the rib are chamfered and wherein the edges of the lid for the access panel are formed from a flexible material and are also chamfered to provide a substantially waterproof sealing fit between the lid and the upstanding rib.

31. An access panel for insertion into an aperture in a floor, desktop or the like, the access panel including a floor frame defining an aperture and wherein a closed well or trough is defined extending along at least one side of the aperture.

32. An access panel as claimed in claim 31 wherein the trough extends along two sides of the aperture.

33. An access panel as claimed in claim 32 wherein the trough extends along four sides of the aperture.

34. An access panel for cable services or the like comprising:

a frame;

a lid adapted to close the frame;

the lid including a latch pivotally connected to the lid, a hatch movable between an open position in which there is an aperture in the lid for which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that the latch is supported in the open position between two or more pillars which have curved inner faces so as to define an expanding trumpet-shaped aperture for cables extending through the hatch and outside of the panel.

35. An access panel as claimed in claim 34 wherein the sides of the lid of the lid are tapered inwards to facilitate closure against the carpet frame and also to sweep aside the carpet.

36. An access panel as claimed in claim 35 wherein the edge of the lid has a slope of 30 to 45 degrees.

37. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated in a frame located in the outlet,

including a latch for locking the lid shut, wherein the latch is bistable in open and closed positions, the latch defining a contact surface which as the lid is closed, contacts the frame to initially pivot the latch in a first direction towards the open position and subsequently after the pivot point of the latch moves below the point of contact of the contact surface with the frame, forces acting on the contact surface due to the frame, tend to cause the latch to pivot in an opposite direction to the closed position, in which the lid is latched shut.

38. A lid as claimed in claim 37 wherein the contact surface of the latch includes a lead in surface which is angled to push the latch inwards on contact with the frame and a second upper surface which is generally parallel to the side of the frame.

39. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of a barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering grade polymer and a hatch which is mounted to the lid in such a manner that the hinge is pivotable about an axis which is located above the plane of the lid.

40. A lid as claimed in claim 39 wherein the pivot axis is located above the load bearing surface of the lid.

**INTERNATIONAL PATENT COOPERATION TREATY**  
**PCT**  
**INTERNATIONAL PRELIMINARY EXAMINATION REPORT**

(PCT Article 36 and Rule 70)

REC'D 29 MAY 2001

WIPO

PCT

Applicant's or agent's file reference 89603	<b>FOR FURTHER ACTION</b>	See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416).
International Application No. <b>PCT/AU00/00280</b>	International Filing Date ( <i>day/month/year</i> ) 31 March 2000	Priority Date ( <i>day/month/year</i> ) 31 March 1999
International Patent Classification (IPC) or national classification and IPC  <b>Int. Cl. <sup>7</sup> E04F 19/08, E04B 5/08, E06B 5/01, H02G 3/08</b>		
Applicant  <b>CABSCAPE HOLDINGS PTY LTD et al</b>		

1.	This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.
2.	This REPORT consists of a total of 4 sheets, including this cover sheet.  <input checked="" type="checkbox"/> This report is also accompanied by ANNEXES, i.e., sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).  These annexes consist of a total of 5 sheet(s).
3.	This report contains indications relating to the following items:  I <input checked="" type="checkbox"/> Basis of the report II <input type="checkbox"/> Priority III <input type="checkbox"/> Non-establishment of opinion with regard to novelty, inventive step and industrial applicability IV <input checked="" type="checkbox"/> Lack of unity of invention V <input checked="" type="checkbox"/> Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement VI <input type="checkbox"/> Certain documents cited VII <input type="checkbox"/> Certain defects in the international application VIII <input type="checkbox"/> Certain observations on the international application

Date of submission of the demand 4 October 2000	Date of completion of the report 18 May 2001
Name and mailing address of the IPEA/AU AUSTRALIAN PATENT OFFICE PO BOX 200, WODEN ACT 2606, AUSTRALIA E-mail address: pct@ipaaustralia.gov.au Facsimile No. (02) 6285 3929	Authorized Officer  <b>JON MILLS</b> Telephone No. (02) 6283 2113

**I. Basis of the report**

1. With regard to the elements of the international application:\*
- ☐ the international application as originally filed.
- ☒ the description,        pages    , as originally filed,  
   pages    , filed with the demand,  
   pages    , received on    with the letter of
- ☒ the claims,        pages    , as originally filed,  
   pages    , as amended (together with any statement) under Article 19,  
   pages    , filed with the demand,  
   pages    19-23, received on 9 January 2001 with the letter of 9 January 2001
- ☒ the drawings,        pages    1-9, as originally filed,  
   pages    , filed with the demand,  
   pages    , received on    with the letter of
- ☐ the sequence listing part of the description:  
   pages    , as originally filed  
   pages    , filed with the demand  
   pages    , received on    with the letter of
2. With regard to the **language**, all the elements marked above were available or furnished to this Authority in the language in which the international application was filed, unless otherwise indicated under this item.  
These elements were available or furnished to this Authority in the following language    which is:
- ☐ the language of a translation furnished for the purposes of international search (under Rule 23.1(b)).
- ☐ the language of publication of the international application (under Rule 48.3(b)).
- ☐ the language of the translation furnished for the purposes of international preliminary examination (under Rules 55.2 and/or 55.3).
3. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, was on the basis of the sequence listing:
- ☐ contained in the international application in written form.
- ☐ filed together with the international application in computer readable form.
- ☐ furnished subsequently to this Authority in written form.
- ☐ furnished subsequently to this Authority in computer readable form.
- ☐ The statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.
- ☐ The statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished
4. ☐ The amendments have resulted in the cancellation of:
- ☐ the description,        pages
- ☐ the claims,        Nos.
- ☐ the drawings,        sheets/fig.
5. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed, as indicated in the Supplemental Box (Rule 70.2(c)).\*\*

\* Replacement sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to this report since they do not contain amendments (Rules 70.16 and 70.17).

\*\* Any replacement sheet containing such amendments must be referred to under item 1 and annexed to this report

**IV. Lack of unity of invention**

1. In response to the invitation to restrict or pay additional fees the applicant has:

- ☐ restricted the claims.
- ☐ paid additional fees.
- ☐ paid additional fees under protest.
- ☐ neither restricted nor paid additional fees.

2. ☒ This Authority found that the requirement of unity of invention is not complied with and chose, according to Rule 68.1, not to invite the applicant to restrict or pay additional fees.

3. This Authority considers that the requirement of unity of invention in accordance with Rules 13.1, 13.2 and 13.3 is

- ☐ complied with.
- ☒ not complied with for the following reasons:

This Authority found multiple inventions as follows:

1. Claims 1,4 and 5 are directed to a floor frame for an access hatch with a flange which is under the floor covering or tapered. It is considered that the thus produced low profile frame comprises a first "special technical feature".
2. Claims 19,20,21,31 and 36 are directed to a lid and frame for an access panel with a pivoted hatch in the lid. It is considered that this comprises a second "special technical feature".
3. Claims 23 is directed to a lid and frame for an access panel with an open hinge and detent means on the lid. It is considered that this comprises a third "special technical feature".
4. Claim 29 is directed to a lid and frame for an access panel with chamfered edges forming a watertight seal. It is considered that this comprises a fourth "special technical feature".
5. Claim 30 is directed to a frame for an access panel with an aperture and a well or trough around its periphery. It is considered that this comprises a fifth "special technical feature".
6. Claim 34 is directed to a lid for an access panel with a bistable latch. It is considered that this comprises a sixth "special technical feature".

Since the abovementioned groups of claims do not share any of the technical features identified, a "technical relationship" between the inventions, as defined in PCT rule 13.2 does not exist. Accordingly the international application does not relate to one invention or to a single inventive concept, a priori. Furthermore, the claims of groups 1 and 2 are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these groups of claims is a low profile access hatch and an access panel with hatches in its lid respectively. However this concept is not novel in the light of many of the citations. Therefore these claims lack unity a posteriori.

4. Consequently, the following parts of the international application were the subject of international preliminary examination in establishing this report:

- ☒ all parts.
- ☐ the parts relating to claims Nos.

**V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement****1. Statement**

Novelty (N)	Claims 1-22,25-35,37	YES
	Claims 23,24,36	NO
Inventive step (IS)	Claims 1-22,25-35,37	YES
	Claims 23,24,36	NO
Industrial applicability (IA)	Claims 1-37	YES
	Claims	NO

**2. Citations and explanations (Rule 70.7)**

DE 4003279 A (Kleinhuis H & Co)

US 4973797 A (Jorgensen et al)

Novelty (N) and Inventive Step (IS)

Kleinhuis discloses a lid which rotates relative to the frame and has detents. All the features of claims 23 and 24 are disclosed.

Jorgensen discloses a lid, or cover (34) to which a hatch (66) is pivotally connected. It thus discloses the features of claim 36.

No other citations or obvious combination of citations renders the remaining claims obvious or not novel.

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

E04F 19/08, E04B 5/08, E06B 5/01,  
H02G 3/08

A1

(11) International Publication Number:

WO 00/60191

(43) International Publication Date:

12 October 2000 (12.10.00)

(21) International Application Number: PCT/AU00/00280

(22) International Filing Date: 31 March 2000 (31.03.00)

(30) Priority Data:

PP 9550

31 March 1999 (31.03.99)

AU

(71) Applicant (for all designated States except US): CABSCAPE HOLDINGS PTY LTD [AU/AU]; Suite G3, 63 Stead Street, South Melbourne, VIC 3205 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOYD, Michael, David [AU/AU]; Suite G3, 63 Stead Street, South Melbourne, VIC 3205 (AU). WHITE, Iain, Kilburn [AU/AU]; Dalriada, 21 Harding Road, Macclesfield, VIC 3782 (AU).

(74) Agent: F B RICE & CO; 605 Darling Street, Balmain, NSW 2041 (AU).

(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: ACCESS PANEL

(57) Abstract

An access panel for providing access to cables, services or the like through an opening in a floor having a floor covering, is disclosed. The access panel includes a floor frame (10) located in the opening and a lid (100) supported on the frame (10). The frame (10) has a support flange (26) extending around its periphery which extends between the floor covering and the floor deck. The flange (26) provides a ramped edge tapered substantially uniformly over a distance of between 10 and 20 times the maximum thickness of the flange (26). The outermost part of the flange (26) is typically formed from a flexible polymeric material. A rib (20) extends around an aperture in the frame (10) and the height of the rib (20) is lower than the load bearing surface of the floor. The hinge (24, 120) is generally square and defines a pivot surface which extends parallel to and is spaced inwardly from an inner edge of the frame (10). A lid (100) for closing the aperture defines a bearing surface (120) which is adapted to slidably engage on the pivot surface (24) to allow the lid (100) to bear and pivot about the pivot surface (24). The lid (100) includes hatches (104, 106) which are moveable between an open position in which there is an aperture in the lid (100) through which cable services may extend and a closed position in which there is no aperture. Locking means (124, 126) are provided between the hatch (104, 106) and the frame (10) to lock the hatch (104, 106) in place in both the open and closed positions.

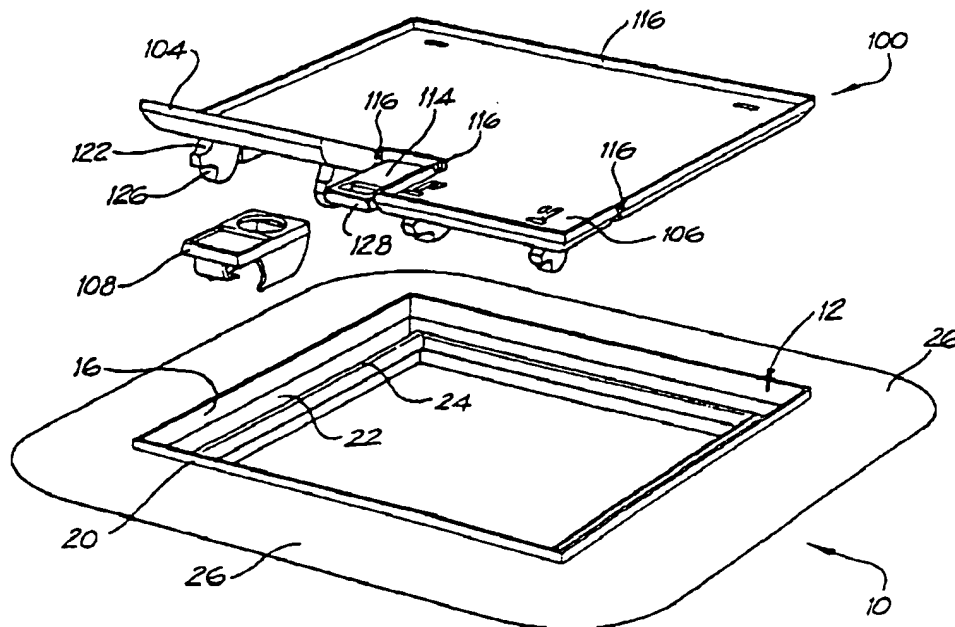

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KC	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon		Republic of Korea	PT	Portugal		
CN	China	KR	Republic of Korea	RO	Romania		
CU	Cuba	KZ	Kazakhstan	RU	Russian Federation		
CZ	Czech Republic	LC	Saint Lucia	SD	Sudan		
DE	Germany	LI	Liechtenstein	SE	Sweden		
DK	Denmark	LK	Sri Lanka	SG	Singapore		
EE	Estonia	LR	Liberia				

9/PRTS  
1

09/937902

0012 Rec'd PCT/PTO 27 SEP 2001

## ACCESS PANEL

### Field of the Invention

This invention relates to an access panel for an outlet for cable services through a barrier such as a floor, wall, ceiling, desktop or the like.

### Background of the Invention

Modern offices house an extensive array of electronic and electrical equipment which require both power supply and interconnecting communications cabling. As a result, such buildings commonly incorporate a hollow raised floor which provides cavities/ducts along which the cabling travels. The transition of power, phone lines, data cables and the like from the sub floor cavities/ducts is achieved through recessed compartments commonly known as floor boxes. An example can be seen in PCT/GB92/011011 (AU 19759/92). Floor boxes generally incorporate a frame which extends around an aperture in the barrier. For floors the frame is typically clamped between the floor surface and the underside of the floor deck which may be made of particle board, metal, cementitious materials or a combination thereof. The floor box includes a lid for closing the panel and is adapted to support a service outlet box mounted under the lid. The outlet box will provide an array of sockets connected to the various cable networks. Equipment above the floor is connected via cable leads which pass through one or more hatches in the lid, which is, or are, able to be rotated to either an open position or a closed position. However, such existing devices suffer from a number of substantial deficiencies.

First, conventional recessed floor boxes have a substantial edge surround or carpet frame which overlies the floor finish and usually projects above the floor surface. Common surface finishes in office include loose laid carpet or vinyl tiles, carpet or vinyl sheet and melamine laminate sheet. As used herein the term floor surface or floor surface covering means the upper part of the floor covering, for example, the upper surface of a vinyl tile or the top of the pile of a carpet. Thus, the edge surrounds of conventional recessed floor boxes form a ridge in the floor which is both unsightly and a safety hazard and may for example, cause office workers to trip, or upset trolleys.

Conventional carpet frames are generally made from injection moulded plastic and consequently are not particularly strong. The floor boxes do not meet the building standards set for supporting loads which the floor has to

meet. Floor boxes are generally exempted from having to meet those standards because they are not, in theory, subject to the same forces as a floor is typically subjected to particularly point or static loads. However, they may be subjected to rolling loads and it would be advantageous to provide an access panel which was substantially as strong as the floor in which it was located.

A further problem with existing floor boxes occurs in the event of a fire. As discussed, the frames are made of a plastics material and support a relatively heavy outlet box. With the heat caused by fire, there is a tendency for the frame to soften and weaken and the outlet box will fall. This creates an aperture in the floor which acts a chimney and facilitates the spread of fire. Thus, the performance of conventional recessed floor boxes, under fire conditions is unsatisfactory.

A further problem with conventional floor boxes is that the lid is unsafe because the lids are not locked down and can be accidentally lifted, for example by pulling the cables. This allows the cables to slip away from the latch opening and under the lid itself, where they are subject to shearing between the lid and the edge of the frame if, for instance, a person stepped on the lid. This not only damages the cables but can be dangerous to staff particularly if the cables are electrical supply cables. A further hazard which can occur if the lid is dislodged, is that the box can trip people. Floor boxes are often inactive in which case they often contain coiled cables. Those coiled cables can expand and push against the lid opening the lid. It is thus desirable that the lid should be latchable when it is both opened and closed.

### Summary of the Invention

In a first aspect of the present invention there is provided a floor having a floor covering and an opening in the floor, an access panel for access to cables, services or the like through the opening, the access panel including a floor frame located in the opening, a lid supported on the frame, the frame having a support flange extending around its periphery wherein the support flange extends between the floor covering and the floor.

By placing the support flange of the frame between the floor and the floor covering, the flange is hidden by the floor covering which not only means the appearance of the flange becomes unimportant but also improves safety.

It is preferred that the flange provides a ramped edge thus providing a substantially continuous smooth surface. Unlike conventional floor boxes, the frame does not have to fit over compressed carpet. Thus, it is possible to provide a ramped edge which is relatively thin and flexible, which will fit satisfactorily beneath a floor covering.

Thus in a second aspect of the present invention, there is provided a frame for an access panel comprising a rigid structural element for supporting an outlet box or the like, the frame including a tapered outer edge or flange wherein the flange tapers substantially uniformly over a distance of at least 10, and preferably, 20 times the maximum thickness of the flange.

In a third aspect of the present invention, there is provided a frame for an access panel comprising:-

a rigid structural frame, defining an outer edge; and

a tapered flange formed from a soft non structural material, typically a flexible polymeric material, abutting the outer edge.

It is preferred that the flange is pre-cambered and extends below the base of the underside of the outer edge so that the underside of the flange presses against a floor located in the same plane as the underside of the flange. This arrangement ensures that a smooth fit is provided against potentially uneven floors, depending on the degree of unevenness of the floor and also compensate for potential distortions of the outer edge of the flange as a result of the process of its manufacture.

The polymeric material may be attached to and overlying the outer edge, either formed as an overmoulding or formed separately and glued or otherwise fixed to the frame. Alternatively, the polymeric material may not be fixed to the frame but may be separable therefrom. This variant has advantages if the frame is to be recessed into a desk or floor panel.

The structural part of the frame may be formed from a rigid high strength material most preferably an engineering grade plastic such as glass reinforced plastic, or a die cast metal such as zinc or aluminium.

Because the frame edge may fit under the floor covering, the appearance of the frame is unimportant as it is largely hidden. Consequently it is possible to make the frame from metal, if desired although the use of a strong plastics material is not precluded. Using metal however may make the frame and access panel stronger and improves fire resistance.

Various materials may be used to form the overmoulding including EVA, rubber modified polypropylene and polyurethane.

5 A fourth aspect of the present invention provides a floor having a floor covering, a floor frame for an access panel having a support flange extending around the periphery of the frame and a lid supported on the frame wherein the highest part of the frame and lid do not project above the floor covering surface.

10 In a preferred embodiment, the frame defines an upstanding rib which extends around a central aperture of the frame, which aperture is closable by a lid, the rib being disposed between the peripheral edge of the flange and the central aperture, and wherein the upstanding rib does not project above the load bearing surface of the floor.

15 The load bearing surface is the surface down to which the pile of the carpet of the floor may crush under normal usage loads. If the floor covering is relatively incompressible for example, vinyl or linoleum, the load bearing surface will be the top surface of the vinyl/linoleum. In use, the floor covering will abut the rib to ensure a close fit of the floor covering around the access panel.

20 Having all the components of the access panel not projecting above load bearing surface of the floor enables the provision of a smooth floor surface which is both safer and more aesthetically pleasing than is possible with conventional floor boxes.

25 It is preferred that the materials and construction of the frame and lid of the access panel of the present invention are such that the load bearing capacity of the frame and lid is substantially the same as that of the surrounding floor.

30 The lid may comprise a rigid strong panel having a flexible overmoulding. The rigid panel may be a steel plate, a die casting or an injection moulded polymer. The flexible overmoulding may be polyurethane or a rubber modified polypropylene.

35 The frame is typically rectangular, most typically square and may define a pivot surface extending parallel to and spaced inwardly from an inner edge of the frame which abuts the floor deck and defines the aperture. The underside of the lid may define a bearing surface which is adapted to slidably engage on the pivot surface to allow the lid to bear on and pivot about the pivot surface.

In a sixth aspect of the present invention, there is provided a lid for an access panel for insertion into an aperture in a floor, wall or desktop or the like barrier for cable services in communication with an opening through the barrier, and adapted to be seated on a frame disposed around the aperture.  
5 the lid including a hatch pivotally connected to the lid, and moveable between an open position in which there is an aperture in the lid through which cable surfaces may extend and a closed position in which there is no aperture, the lid being characterised in that locking means are provided between the hatch and the frame to lock the hatch in place in both the open  
10 and closed positions.

In a seventh aspect, the present invention provides a lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with an opening therethrough, the lid including a hatch  
15 pivotally connected to the lid and moveable between an open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no such aperture characterised in that when the lid is latched and the hatch is open, neither the lid or the hatch can be raised from a predetermined position by movement of cable.

20 In an eighth aspect of the present invention, there is provided a lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering grade  
25 polymer and an overmoulding formed from a flexible polymeric material, the overmoulding defining at least one hatch.

The lid and hatch may be joined together by an integral hinge.

The ninth aspect of the present invention provides an access panel for accessing cable services through a barrier such as a floor, wall or the like. the  
30 access panel having a frame and a lid and wherein the frame defines first and second bearing surfaces being shaped and configured such that the first bearing surface defines a hinge supported away from a wall of the frame and wherein the lid defines a second bearing or hinge surface whose ends define detents, the first and second bearing surfaces being shaped and configured  
35 such that in use the second bearing surface is arranged to bear on the first bearing surface to form an open hinge element, relative movement of the

hinge surface about the bearing surface allowing the lid to rotate, characterised in that when the lid is closed, the detents engage underneath the means providing the bearing surface and prevent the one end of the lid adjacent the bearing surfaces from being raised relative to the bearing surface.

In a preferred embodiment, a similar second bearing surface is defined at an opposite end of the frame and a latch on the lid is engageable underneath the second bearing surface. The latch which holds the lid closed, preferably includes one or more projections which engage underneath the second bearing surface, the geometry of the arrangement being such that pressure on the underside of the lid tends to force the latch to close more tightly.

The way the lid is secured by the latch is important as it provides the access panel with a solid feel should it be walked on. Ideally, it should feel as solid as the surrounding floor.

It is preferred that the bearing elements are symmetrically arranged such that the lid can be turned around by  $180^\circ$  with either bearing element acting as the fulcrum for the hinge.

In a particularly preferred embodiment, two further hinge elements are provided so that the lid can be turned around through  $90^\circ$  and still function.

An access panel embodying various aspects of the present invention has substantial benefits in preventing water from entering the access panel when the lid is closed. First, the tapering flange extending around the outside, provides a type of ramp or levee which acts as a first line of defence against ingress of water through the panel.

Secondly, the upstanding rib extending around the frame, in co-operation with the rib around the periphery of lid, also inhibits ingress or water through the lid. The rib is typically rigid but in some embodiments may be formed from a flexible overmoulding in which case it is preferred that the rib is angled towards the centre of the frame. If the edges of the lid are also formed from a flexible material and are also angled, a chamfered sealing fit is formed when the lid is closed on the frame with the rib bent outwardly.

In a particularly preferred embodiment, a third line of defence is a closed channel formed extending along and around one or more inner edges of the frame which is adapted to trap water which has passed between the lid and the upstanding ribs.

Thus in a tenth aspect of the present invention, there is provided an access panel for insertion into an aperture in a floor, wall or the like, wherein the frame defines an aperture around which an upstanding rib extends, wherein the edges of the rib are chamfered and wherein the edges of the lid for the access panel are formed from a flexible material and are also chamfered to provide a substantially waterproof sealing fit between the lid and the upstanding rib.

In an eleventh aspect of the present invention, there is provided an access panel for insertion into an aperture in a floor, desktop or the like, the access panel including a floor frame defining an aperture and wherein a closed well or trough is defined extending along at least one side of the aperture, preferably on two sides and most preferably on all four sides of the aperture.

One problem with cables, particularly modern data transmission cables, is that they are easily damaged by kinking or bending the cables through too tight a radius.

Thus, in a twelfth aspect of the present invention there is provided an access panel for cables, services or the like comprising:

a frame;

a lid adapted to close the frame;

the lid including a latch pivotally connected to the lid, a hatch movable between an open position in which there is an aperture in the lid for which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that the latch is supported in the open position between two or more pillars which have curved inner faces so as to define an expanding trumpet-shaped aperture for cables extending through the hatch and outside of the panel.

By defining a smoothly curved trumpet shaped opening, a large bend radius of the cables is ensured. Also there are no sharp edges which might kink or damage cables.

It is preferred that the sides of the lid of the lid are tapered inwards to facilitate closure against the carpet frame and also to sweep aside the carpet frame. Typically the edge of the lid has a slope of 30 to 45 degrees.

When the hatch is in the open position it will typically be rotated by 30 degrees relative to the plane of the lid.

One important feature of access panels, is to ensure that they shut securely.

Thus, according to a fourteenth aspect of the present invention, there is provided a lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated in a frame located in the outlet, including a latch for locking the lid shut, wherein the latch is bistable in open and closed positions, the latch defining a contact surface which as the lid is closed, contacts the frame to initially pivot the latch in a first direction towards the open position and subsequently after the pivot point of the latch moves below the point of contact of the contact surface with the frame, forces acting on the contact surface due to the frame, tend to cause the latch to pivot in an opposite direction to the closed position.

The contact surface of the latch include a lead-in surface which is angled to rotate the latch open on first contact with the frame and a second upper surface which extends generally parallel to the side of the frame and which rotates the latch towards closure as the lid moves towards the closed position.

The eighth aspect of the present invention, refers to the lid comprising a rigid panel and the hatch being formed in an overmoulding, with the lid and hatch preferably being joined together with an integral hinge. In some embodiments, it is desirable to make both the hatch and lid from a rigid structural material such as engineering grade polymer which precludes the use of a flexible overmoulding. In such an embodiment, in order to avoid crushing the pile of the carpet as the hatch is opened, it would ordinarily be necessary for a clearance of around 5mm to be provided between the hatch and the lid. However, such an arrangement would provide too much play for the hatch and make it liable to accidental closure if it was stood on or kicked.

Thus in a fifteenth aspect of the present invention, there is provided a lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering grade polymer and a hatch which is attached to the lid wherein the hinge is pivotable about a hinge axis which is located above the plane of the lid.

Typically, the pivot axis will be located at or above the load bearing surface of the lid. The load bearing surface will typically be the crush point

of a carpet mounted on the lid. Placing the pivot axis at this height prevents crushing of the carpet when the hatch is open and also avoids the need for a substantial gap between the hatch and lid.

Although, having the pivot at that level is particularly useful when the hatch is not an overmoulding and is formed from a rigid material separately from the lid, the same principle may be applied to the situation where the hatch is an overmoulding and the hinge is a flexible element formed from the overmoulding.

#### 10 **Brief Description of the Drawings**

Specific embodiments of the invention will now be described, by way of example only, and with reference to the accompanying drawings in which:

Figure 1 is a perspective view from above of a first embodiment of an access panel and lid components embodying the present invention for above:

15 Figure 2 is a perspective view of the components shown in Figure 1 viewed from below;

Figure 2a is a cross section through one of the components shown in Figure 2, specifically a latch;

Figure 3 is a side view of the components shown in Figure 2;

20 Figure 4 illustrates a section through a lid for the access panel shown in Figure 1;

Figure 5 shows a section through a frame for the access panel shown in Figure 1;

25 Figure 6 illustrates the lid located in position on the frame with a hatch in an open position: and

Figure 7 illustrates a variant of the frame of the first embodiment having a modified flange arrangement;

Figure 8 is a perspective view of part of the frame of the variant shown in Figure 7 illustrating further modified features;

30 Figure 9 is a schematic side view of a variant of a latch for the access panel of the present invention;

Figure 10 is an explanatory diagram illustrating the forces biasing the latch in open and closed positions;

35 Figure 11 is a schematic side view of an alternative hinging mechanism for a variant of the hatch:

Figure 12 is a pictorial sketch of part of the underside of the variant of the hatch illustrated in Figure 11:

Figure 13 is pictorial sketch of a part of the lid adapted to cooperate with the underside of the hatch shown in Figure 12;

5 Figure 14 is a schematic side view of a pillar of the hatch of Figure 11; and

Figure 15 is a view of the underside of the hatch of Figure 14.

### Detailed Description of a Preferred Embodiment

10 Referring to Figure 1, the access panel comprises two sub-assemblies or components, a support frame 10 and a lid 100. Turning to consider the support frame 10 first, as is best seen in Figures 2 and 3, the support frame comprises a structural element or frame 12 and a flexible overmoulding 14. The frame is generally square. The structural element is manufactured from  
15 a rigid high strength material such an engineering grade polymer (for example glass filled polypropylene or nylon), or more preferably die cast metal such as aluminium or zinc.

The structural element 12 of the frame includes a square frame element 16 which is adapted to locate inside an aperture in a floor, wall, desk  
20 or the like and an integral load bearing flange 18 which extends away from the outer edge of the frame element 16. This flange sits on the floor deck in use and supports the frame element. The load bearing flange 18 may be either screwed or glued to the floor deck. Fastening with screws facilitates removal and reuse of the box but is more time consuming than simply gluing  
25 the flange to the floor deck.

Turning back to Figure 1, channels 22 run along the inner edges of the frame element 18. As is best seen in Figure 3, the lip of the channel 24 provides a bulbous upper edge which projects inwardly from the channel 22.

The overmoulding 12 is manufactured from a flexible polymeric  
30 material such as epdm or polyurethane. The upper edge of the overmoulding 18 defines an upstanding rib 20 which projects above the flange 10. The outer edge of the overmoulding defines a flange 26 which is tapered and forms a ramp which is typically at an angle of from 1 in 10 to 1 in 20. This allows the floor finish such as a carpet, carpet tile or the like, to extend over  
35 the flange and abut the upstanding rib 20 extending around the central aperture of the frame. The upstanding rib 20 acts as an edge trim to the floor

finish. A typical floor finish is modular carpet tile, and the rib is sized to correspond with the thickness of the bonding layer at the base of the carpet pile. Figure 3 illustrates the frame 10 located in an aperture in a raised floor deck with carpet 23 extending over the flange 26 and abutting the upstanding rib 20

The overmoulding may be moulded separately to the structural frame and then attached. Alternatively, it may be moulded directly onto the frame. To ensure that the overmoulding is firmly attached to the structural frame, buttons 28 are provided on the underside of the overmoulding which engage in corresponding sockets 30 defined in the structural frame.

The lid 100 has three elements: the lid panel itself 102, access hatches 104 and 106, and a latch 108. With reference to Figure 4 in particular, the lid has a structural core 110 and a flexible overmoulding 112. The core comprises a rigid plate manufactured from metal or engineering grade polymer although the preferred material is steel plate because its strength allows for the core to be relatively shallow, thus providing maximum clearance for plugs and cable terminals inside the box cavity, yet providing a strength which is comparable to the surrounding floor. However, engineering grade polymers have the advantage of being mouldable to more exacting tolerances than steel and would simplify overmoulding of the outer sheath 112 of the lid 100.

With reference to Figure 1, the main central area of the lid is formed from the steel plate as is an integral tongue 114 whilst the hatches 104 and 106 are formed from the flexible overmoulded material. The tongue may, however, be formed, wholly or partly, from the flexible overmoulded material. This allows the hatches 104, 106 to be linked with the lid 102 by flexible hinges formed from the flexible material.

Around the outer edge of the lid and hatches, there is an upstanding ridge 116 which defines a rectangular perimeter which has a small cut-out where the tongue is formed and which is adapted to receive a piece of carpet tile or the like for matching the appearance of the lid to the surrounding floor covering. As is best seen in Figure 4, below the ridge, the outer edge 118 of the lid is chamfered which assists in forming a good seal with the upstanding rib 20 of the overmoulding when the lid is used to close the aperture in the frame of the access panel 10.

The angle of the chamfered edge is about 30 to 40°. The chamfer also has the function of sweeping aside carpet pile so that the carpet pile is not trapped beneath the edge of the lid when the lid is closed.

As is best seen in Figure 3, the underside of the lid defines one or more  
5 ledges 120 extending away from opposite side of the lid to the hatches. The upper part of the ledge and the lower part of the lid define a curved generally J shaped bearing surface bearing or socket 120. In use, when the lid is placed on the frame, the socket engages over the lip 24 of the channel and this forms  
10 an open hinge which allows the lid to rotate about the lip 24 which acts as a fulcrum to either open or close the access panel. Further, as the detent engages under the bulbous lip 24, pressure on the underside of the lid does not cause the detent to be raised relative to the lip, as the lip acts as a barrier.

The hatches are part of the overmoulding and are thus formed from a flexible material and consequently have to have thick cross sections to  
15 provide sufficient stiffness. The thick cross sections also allow large bend radii which inhibits kinking of the cables.

As discussed above, the hatches are joined to the lid body by relatively thin webs which act as integral hinges. In the areas where there is an upstanding ridge 116, V shaped cut-out portions are provided in the ridge to  
20 allow the hatch to rotate relative to the lid body 102. The hinge webs are relatively long to ensure that the hatch will bend when the lid is covered with a floor surface material, not shown, which is glued onto the lid inside the perimeter defined by the ridge 116.

Turning to Figure 2, each hatch has two supporting pillars 122  
25 depending from the underside of the hatch, which support the hatch in an open position when required. As can be seen, each pillar has two concave support recesses, an upper recess 124 adjacent the base of the hatch surface and a lower recess 126 close to the lower end of the depending pillar. The upper set of recesses are adapted to hold the hatches in a closed position.  
30 The lower set of recesses hold the hatches in an open position. If it is desired to provide more than one opening aperture, for example to allow for a larger than normal cable, another set of recesses may be provided on the pillar for each desired angle of opening. In another embodiment of the invention the upper recess may be omitted in which case the hatch is retained closed by a  
35 face of the pillar 122 abutting against the lip 24 of the frame.

Each pillar has an outwardly curving inner face such that the gap between the two pillars supporting a hatch increases from the hinge joining the hatch to the lid outwardly to define a trumpet shaped opening which prevents kinking and over-tight bends in the cables when fed through the hatch.

A tongue 114 extends away from structural core 110 of the lid and is integral therewith. On the free end of the tongue a cylindrical hinge shaft 128 is defined. The latch 108 is mounted on that shaft. The latch comprises a lever which has a generally C-shaped hinge barrel 132 on one end and two downwardly projecting flanges 134 each having a concave mouth 136 which is adapted to engage on the bulbous lip 24 of the channel when the latch is closed. The hinge barrel 132 is retained on the hinge shaft 128 by a snap in retaining clip 136 which has a depending button 138 on its underside which projects through a hole 140 in the latch and the button engages against the hinge shaft 128 preventing the latch from dislodging from the shaft. The geometry of the arrangement is such that when the lid is closed with the latch locked, upward forces on the lid tend to force the latch into a tighter closure.

In an alternative construction, not shown, the latch may be formed integrally with the trap door over moulding as a projection off the end of the tongue. In either configuration the latch may have a single central projecting flange that passes through a slot in the tongue. Again the flange has a concave mouth which engages around the channel bulb 24. The latch has projections that prevent the latch from rotating out of the slot in the tongue. These can be formed as elements on the flange, or as a secondary flange on each side of the latch lever or as a projection off a retaining clip. In this configuration the retaining clip is similar to the clip 136 described above but serves to stiffen the lever to offset the flexibility of the moulding material.

The retaining clip may be embossed or otherwise treated to display a brand name or label such as "pull to open". Alternatively it may be transparent and have mounted beneath it an LED or warning light indicative of the power status of the wiring leading to the floor box. In many applications it is desirable to have a floor box dedicated to one particular cable service, for example for power. In this configuration rather than a square access panel, the access panel will be relatively long and narrow and

the lid will typically have only one hatch which is located on one side of the lid.

In another alternative embodiment the service sockets are not mounted in the box but may be mounted on the underside of the lid so that when the lid is opened the sockets are rotated above the floor where they are more easily accessible. In this embodiment the lid will be fitted with a flexible conduit to protect the incoming cables.

Figure 7 shows a variant of the support frame shown in Figure 1. In the variant 210, of which only the outer part forming the flange and upstanding rib 220 is illustrated, the flange 226 is not formed as an overmoulding, but instead is formed separately but is still typically formed from a flexible polymeric material. The inner edge of the flange defines an L-shaped rebate 227 which mates with an inverted L-shaped rebate 229 on the outer edge of load bearing flange 218. The underside of the flange 226 is cambered so that the tip 226a of the flange projects below the plane of the lower surface 218a of the load bearing flange 218 so that the flange is biased to press downwardly to form a smooth fit against uneven floors.

If desired, the flange 226 may be glued to the load bearing flange 218. In the variant shown in Figure 7, the upstanding rib 220 is formed from the material of the frame in a structural material such as engineering grade polymer and is not made from the same flexible polymeric material as the flange 226.

Figure 8 shows a perspective view of one corner of the support frame 210. Variations not shown in the first embodiment, include an upstanding rib 223 which extends along the base of the channel 222 of the frame 210 and generally triangular infills 225 located in the four bottom corners of the frame where the channels meet.

When the lid 100 is in the open position in which one of the edges of the lid 100 is located inside channel 222, the rib 223 and/or the triangular infills 225 press against the ridge 116 and act to hold the underside of the lid against the inner surface 231 of the channel. This keeps the top surface of the lid, which is usually carpeted, away from the sides of the channel and the upstanding rib 220, and helps prevent the carpet from being crushed.

Figure 9 shows a variant 230 of the latch. Like latch 130, latch 230 comprises a lever 231 from which depends a generally C-shaped hinge barrel

232 on one end and two downwardly projecting flanges 234 (of which only one is visible), each having a generally concave mouth 236 which is adapted to engage on the bulbous lip 24 of the channel when the latch is closed. The hinge barrel 232 is retained on the hinge shaft 128 by a snap-in retaining clip, not shown, which has a depending button on its underside which projects through a hole in the latch and the button engages against the hinge shaft 128 preventing the latch from dislodging from the hinge shaft in an arrangement which is not illustrated in Figure 9 but is as described in relation to the first embodiment of the latch.

The latch is bi-stable, i.e. stable in two positions, an open position and a closed position.

The first stable position is when the latch is in the closed position and the latch lever 231 is generally parallel to the lid.

The second stable position occurs when the latch is open and the lever extends upwardly at an angle of about 60° to the plane of the lid.

As the lid is closed, the structure of the latch and its interaction with the upstanding rib 20 of the frame are such that the latch is first of all moved to the open stable position if it is not already in the open position and as the lid is pressed down the latch is maintained in the open position until the central axis 128a of the hinge shaft 128 passes the rib after which time the interaction between the rib and the latch is such as to cause the latch to lock closed. This is explained with reference to Figure 9, in which the interaction between the latch and the upstanding rib 20, shown in two positions a and b in dashed lines, is illustrated. First, as is best seen in Figure 9, it should be noted that the outer edge of the latch, being the edge which interacts with the rib 20 as it passes the rib, includes a first, upper portion 233, which is generally planar and extends generally perpendicular to the plane of the lever 231, a slight bulge 235 and a sloping "lead-in" portion 237 which is angled at approximately 5 to 10° relative to upper portion 233. As the lid is closed, the lid and latch pivot about a point distal from the latch as the distal edge of the lid pivots on one of the bulbous lips 24 of the channel. HP. The lid and latch move downwards until the lead in surface 237 contacts the rib 20a. The rib exerts a reaction force  $F_1$  on the lead in surface 237 which applies a torque to the latch which acts about the pivot axis 128a of the latch and causes the latch to rotate about the hinge barrel 128 in the same direction as the force  $F_1$ , thus moving the latch to the open stable position. If the latch is already

in the open position, the force  $F_1$  helps bias the latch in that position.

However, as the lid rotates further down in the direction A, the point of contact between the upstanding rib 20 and the outer edge of the latch crosses the bulge 235 which is coincident with the axis 128a of the hinge barrel 128 after which time the force  $F_2$  acting on the latch due to the interaction of the upper portion 237 with the rib 20 acts above the central axis of the hinge shaft 128. The reaction force  $F_2$  causes the latch to rotate in the opposite direction of the hinge shaft, thereby closing the latch automatically as the lid is closed.

Thus, the latch is automatically opened and then closed to lock the lid in place as the lid is lowered closed. The biasing of the latch in either the fully closed or fully open position has safety advantages as it means that the latch is either in the closed position in which case the lid is securely latched or, if open, is very obviously open.

Finally, Figures 11 to 15 illustrate a yet further variant of the present invention, in which the hatch and lid are moulded separately, typically in an engineering grade polymer which is rigid. The hatches and the lid are then assembled together in a manner in which the hatch is pivotable relative to the lid for opening and closing the hatch. If the latch and the lid are both made from a rigid material, and the latch is conventionally hinged to the lid in the plane of the lid, the inventors discovered that problems arose. These problems arise because of the conflicting need to minimise the gap between the lid and the hatch for aesthetic and safety reasons and the need to provide a clearance, in the order of 5mm, to allow the hatch to rotate to the open position.

The embodiment described in Figure 11 et seq, solves this problem by having the pivot point of the latch above the pile of the carpet or at least above the load bearing surface corresponding to the crush point of the carpet, thus avoiding the requirement for the 5mm gap and reducing the amount of required clearance. The lack of clearance means that the hatch can be pivoted open, the lid closed and latched shut with the hatch locked open, with the hatch remaining resistant to accidental closure such as when it is stood on, kicked or the like.

As discussed above, the lid 300 and hatch 302 are separately formed from engineering grade polymer. The schematic drawing in Figure 11, shows a series of pairs of bearing surfaces 304, 306 and 308, 310 respectively which

are arcuate and which are all centred on the pivot point P about which the hatch 302 rotates. The pivot point P is typically at the crush point of the carpet just above the upstanding wall/rib 311. It is to be noted that pairs of bearing surfaces which are shown in Figure 11 do not all occur in the plane as is suggested in Figure 11 (which merely illustrates the principal of operation of the hinge), but in fact occur in different planes as illustrated in the subsequent drawings.

Figure 12 shows a perspective view of a part of the underside of a hatch 302 from which can be seen a series of depending ribs 312 which define the arcuate sliding surface 310 which cooperates and slides on sliding surface 308 which is part of the lid 302 as described below.

As can be seen from Figure 12, at the rear end of the rib below the upstanding wall 311, at the rear end of one or more of the ribs, there is a projection 314 which projects to one side of the rib 312. Thus, the rib is generally L-shaped in horizontal cross section.

Figure 13 is a perspective view showing a projection 316 from the lid 300 which defines an arcuate hinge support and bearing surface 308 on which the hatch slides. Extending upwardly from the bearing surface 308, are a series of pillars 318 which define stop portions 319 on one side of the pillar so that the pillars are generally L-shaped in cross section in the plane of the lid. The upper surface of the pillars are parallel to the plane of the lid and to the plane of the hatch when the hatch is in the closed position, in which position, the bottom surface of the top of the hatch rests on top of the pillars. Figure 14 illustrates support pillars 322 of the hatch which are similar to support pillars 122 of the first embodiment of the hatch except that the inner surface 324 of the support pillar is generally planar and sloping, and at the top of the pillar an arcuate slot 326 defines bearing surface 304. The hatch may be located on the lid by simply sliding the arcuate projection 316 between the lower end of the ribs and the arcuate surface 304 defined by the support pillars 322 located at each end of the hatch (clearly these two surfaces are spaced apart from one another and the arcuate portion does not actually slide between them as such). Once the hatch has been slid onto the arcuate portion, it can be displaced laterally until the projections 314 abut the side of the pillars 318 and the hatch is locked on the lid and locked in place. When the latch is fitted this prevents the hatch from sliding back to the position of initial fitment and it is therefor unable to be accidentally

removed. When the hatch is opened, projections abut the stop portion and prevent the hatch from being removed from the lid and also limit the angle about which the hatch may rotate. The particular hinge structure also constrains the arc of movement of the hatch and this reduction in "play" also helps to prevent accidental closure of the hatch.

It will be appreciated by persons skilled in the art that numerous variations and/or modifications may be made to the invention as shown in the specific embodiments without departing from the spirit or scope of the invention as broadly described. The present embodiments are, therefore, to be considered in all respects as illustrative and not restrictive.

## CLAIMS

1. A floor having a floor covering and an opening in the floor, an access panel for access to cables, services or the like through the opening, the access panel including a floor frame located in the opening, a lid supported on the frame, the frame having a support flange extending around its periphery  
5 wherein the support flange extends between the floor covering and the floor.
2. A floor as claimed in claim 1 wherein the flange provides a ramped edge.
3. A floor as claimed in claim 1 wherein the flange is formed in two  
10 abutting parts from different materials.
4. A frame for an access panel comprising a rigid structural element for supporting an outlet box or the like, the frame including a tapered outer edge or flange wherein the flange tapers substantially uniformly over a distance of at least 10, and preferably, 20 times the maximum thickness of the flange.
- 15 5. A frame for an access panel comprising:-  
a rigid structural frame, defining an outer edge; and  
a tapered flange formed from a soft non structural material, typically a flexible polymeric material, abutting the outer edge.
6. A frame as claimed in claim 5 wherein the flexible polymeric material  
20 is attached to and overlying the outer edge.
7. A frame as claimed in claim 6 wherein the flexible polymeric material is separate from the outer edge and defines a step portion arranged to mate with a corresponding recess on the outer edge.
8. A frame as claimed in claim 7 wherein the structural part of the frame  
25 is formed from a rigid high strength material.
9. A frame as claimed in claim 8 wherein the high strength material is either an engineering grade plastic or a metal.
10. A frame as claimed in claim 8 wherein the high strength material is a die cast metal, such as zinc or aluminium.
- 30 11. A frame as claimed in any one of claims 5 to 10 wherein the flexible polymeric material is eva, rubber modified polypropylene, or polyurethane.
12. A floor having a floor covering, a floor frame for an access panel having a support flange extending around the periphery of the frame and a lid supported on the frame wherein the highest part of the frame and lid do not  
35 project above, and are preferably below the floor covering surface.

13. A frame as claimed in any one of claims 4 to 11 wherein the frame defines an upstanding rib which extends around a central aperture of the frame, which aperture is closable by a lid, the rib being disposed between the peripheral edge of the flange and the central aperture, and wherein the upstanding rib does not project above, and are preferably below, the load bearing surface of the floor, the load bearing surface being the surface down to which the pile of the carpet of the floor crushes under normal usage loads.

14. A floor incorporating a frame as claimed in any one of claims 4 to 11 wherein the materials and construction of the frame and lid are such that the load bearing capacity of the frame and lid is substantially the same as that of the surrounding floor.

15. A frame as claimed in claim 13 or 14 wherein the lid comprises a rigid structural panel having a flexible overmoulding.

16. A frame as claimed in claim 15 wherein the rigid panel is a steel plate, a die casting or an injection moulded polymer.

17. A frame as claimed in claim 15 or 16 wherein the flexible overmoulding is polyurethane or a rubber modified polypropylene.

18. A frame as claimed in any one of claims 4 to 17 wherein the frame is rectangular and defines a pivot surface extending parallel to and spaced inwardly from an inner edge of the frame which inner edge abuts the floor deck and defines the aperture.

19. A frame as claimed in claim 18 wherein the underside of the lid defines a bearing surface which is adapted to slidably engage on the pivot surface to allow the lid to bear on and pivot about the pivot surface.

20. A lid for an access panel for insertion into an aperture in a floor, wall or desktop or the like for cable services in communication with an opening through the barrier, the lid including a hatch pivotally connected to the lid, and moveable between an open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that locking means are provided between the hatch and the frame to lock the hatch in place in both the open and closed positions.

21. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of the barrier and in communication with an opening therethrough, the lid including a hatch pivotally connected to the lid and moveable between an

open position in which there is an aperture in the lid through which cable services may extend and a closed position in which there is no such aperture characterised in that when the lid is latched and the hatch is open, neither the lid or the hatch can be raised from a predetermined position by

5 movement of cable.

22. A lid for an outlet for cable services through a barrier such as a floor, wall or the like. adapted to be seated on or closely adjacent a surface of the barrier and in communication with a hole therethrough. the lid comprising a rigid panel formed from a structural material. such as metal or engineering  
10 grade polymer and an overmoulding formed from a flexible polymeric material, the overmoulding defining at least one hatch.

23. A lid for an outlet for cable services as claimed in claim 22 wherein the lid and hatch are joined together by an integral hinge.

24. An access panel for accessing cable services through a barrier such as a floor, wall or the like. the access panel having a frame and a lid and wherein  
15 the frame defines first and second bearing surfaces being shaped and configured such that the first bearing surface defines a hinge supported away from a wall of the frame and wherein the lid defines a second bearing or hinge surface whose ends define detents. the first and second bearing  
20 surfaces being shaped and configured such that in use the second bearing surface is arranged to bear on the first bearing surface to form an open hinge element. relative movement of the hinge surface about the bearing surface allowing the lid to rotate. characterised in that when the lid is closed, the detents engage underneath the means providing the bearing surface and  
25 prevent the one end of the lid adjacent the bearing surfaces from being raised relative to the bearing surface.

25. An access panel as claimed in claim 24 wherein a further second bearing surface is defined at an opposite end of the frame and a latch on the lid is engageable underneath the second bearing surface.

30 26. An access panel as claimed in claim 25 wherein the latch includes one or more C-shaped projections which engage underneath the second bearing surface. the geometry of the arrangement being such that pressure on the underside of the lid tends to force the latch to close more tightly.

35 27. An access panel as claimed in claim 25 or 26 wherein the bearing elements are symmetrically arranged such that the lid can be turned around by 180° with either bearing element acting as the fulcrum for the hinge.

28. An access panel as claimed in claim 27 wherein two further bearing elements are provided.

29. An access panel as claimed in any one of claims 24 to 28 characterised in that a closed channel is formed extending along and around one or more inner edges of the frame.

30. An access panel for insertion into an aperture in a floor, wall or the like, wherein the frame defines an aperture around which an upstanding rib extends, wherein the edges of the rib are chamfered and wherein the edges of the lid for the access panel are formed from a flexible material and are also chamfered to provide a substantially waterproof sealing fit between the lid and the upstanding rib.

31. An access panel for insertion into an aperture in a floor, desktop or the like, the access panel including a floor frame defining an aperture and wherein a closed well or trough is defined extending along at least one side of the aperture.

32. An access panel as claimed in claim 31 wherein the trough extends along two sides of the aperture.

33. An access panel as claimed in claim 32 wherein the trough extends along four sides of the aperture.

34. An access panel for cable services or the like comprising:  
a frame;

a lid adapted to close the frame;

the lid including a latch pivotally connected to the lid, a hatch movable between an open position in which there is an aperture in the lid for which cable services may extend and a closed position in which there is no aperture, the lid being characterised in that the latch is supported in the open position between two or more pillars which have curved inner faces so as to define an expanding trumpet-shaped aperture for cables extending through the hatch and outside of the panel.

35. An access panel as claimed in claim 34 wherein the sides of the lid of the lid are tapered inwards to facilitate closure against the carpet frame and also to sweep aside the carpet.

36. An access panel as claimed in claim 35 wherein the edge of the lid has a slope of 30 to 45 degrees.


37. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated in a frame located in the outlet.

including a latch for locking the lid shut, wherein the latch is bistable in open and closed positions. the latch defining a contact surface which as the lid is closed, contacts the frame to initially pivot the latch in a first direction towards the open position and subsequently after the pivot point of the latch moves below the point of contact of the contact surface with the frame, forces acting on the contact surface due to the frame, tend to cause the latch to pivot in an opposite direction to the closed position, in which the lid is latched shut.

38. A lid as claimed in claim 37 wherein the contact surface of the latch includes a lead in surface which is angled to push the latch inwards on contact with the frame and a second upper surface which is generally parallel to the side of the frame.

39. A lid for an outlet for cable services through a barrier such as a floor, wall or the like, adapted to be seated on or closely adjacent a surface of a barrier and in communication with a hole therethrough, the lid comprising a rigid panel formed from a structural material, such as metal or engineering grade polymer and a hatch which is mounted to the lid in such a manner that the hinge is pivotable about an axis which is located above the plane of the lid.

40. A lid as claimed in claim 39 wherein the pivot axis is located above the load bearing surface of the lid.

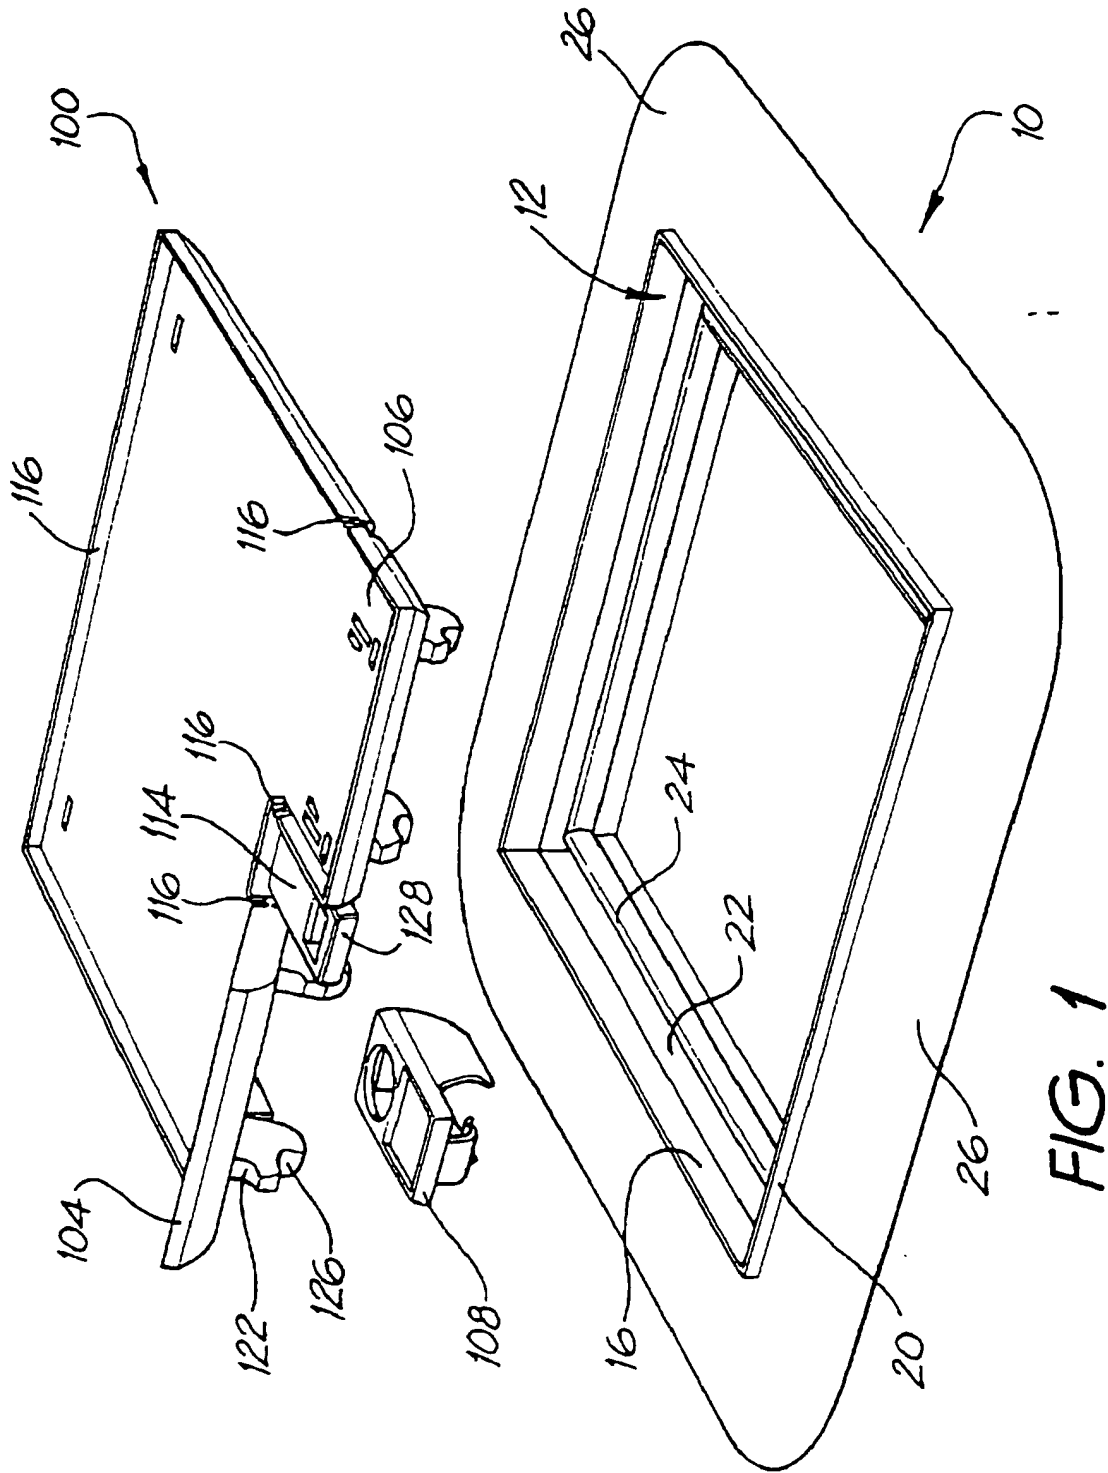

Substitute Sheet  
(Rule 26) RO/AU

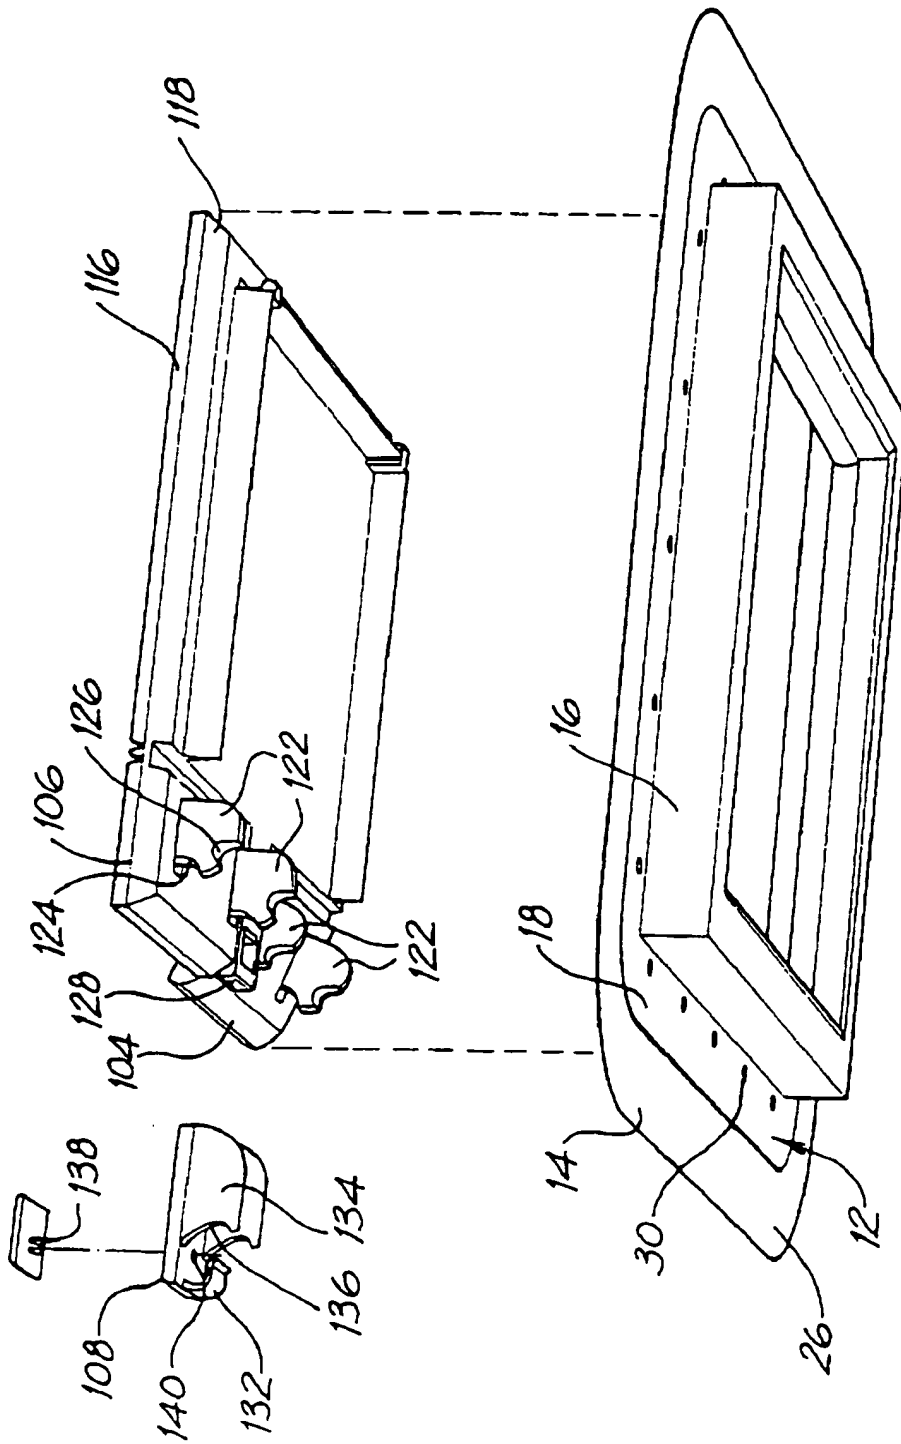


FIG. 2

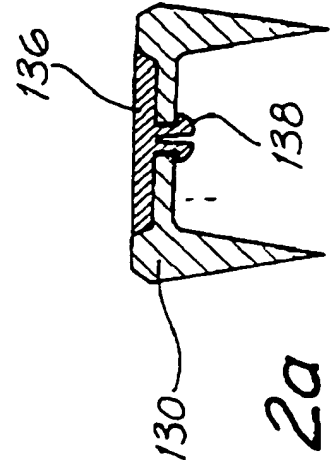


FIG. 2a



From: Suzanne Blaker To: James H Marsh Jr

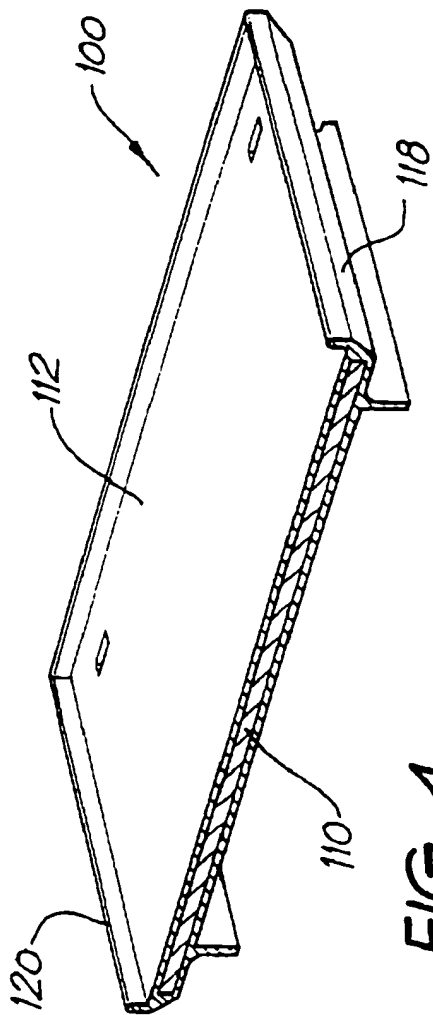


FIG. 4

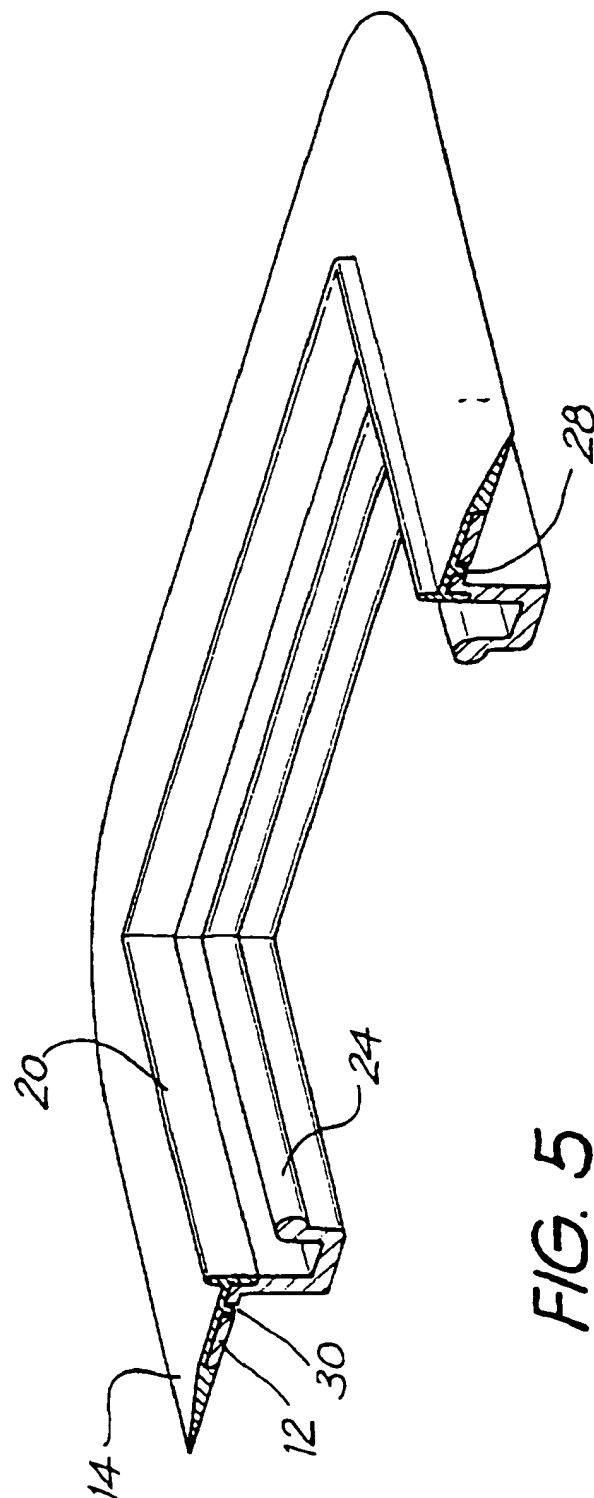


FIG. 5

Substitute Sheet  
(Rule 26) RO/AU

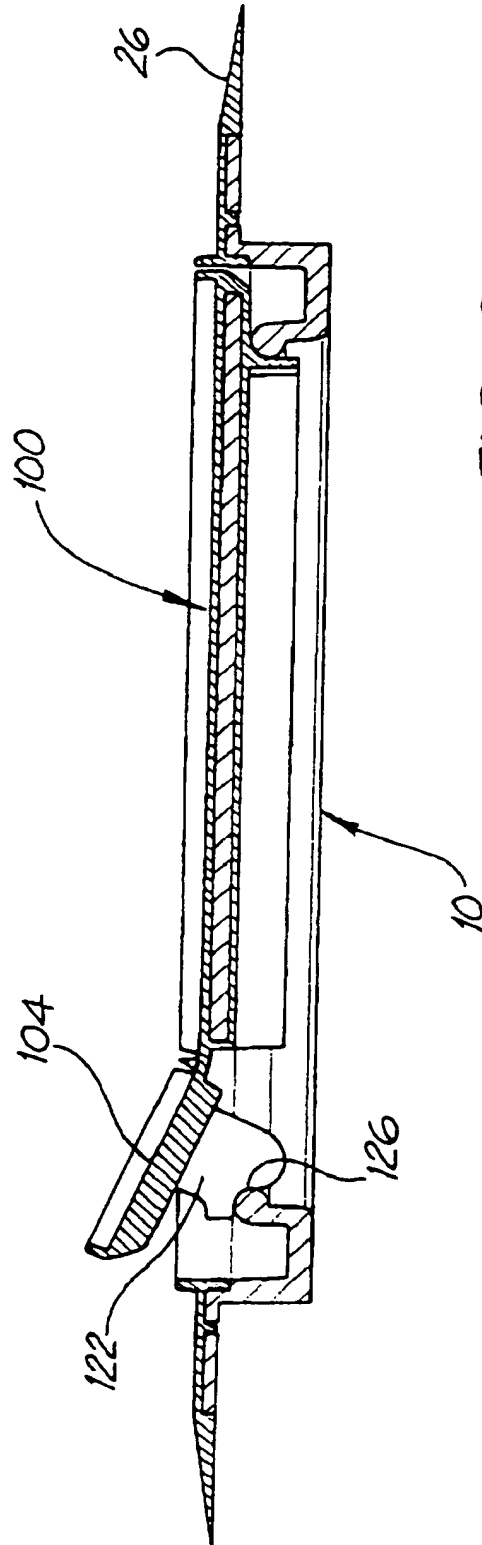


FIG. 6

Substitute Sheet  
(Rule 26) RO/AU

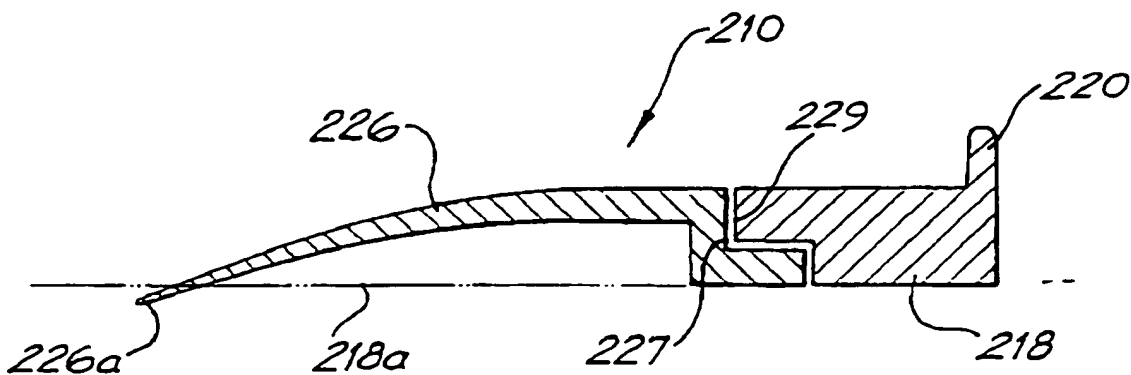


FIG. 7

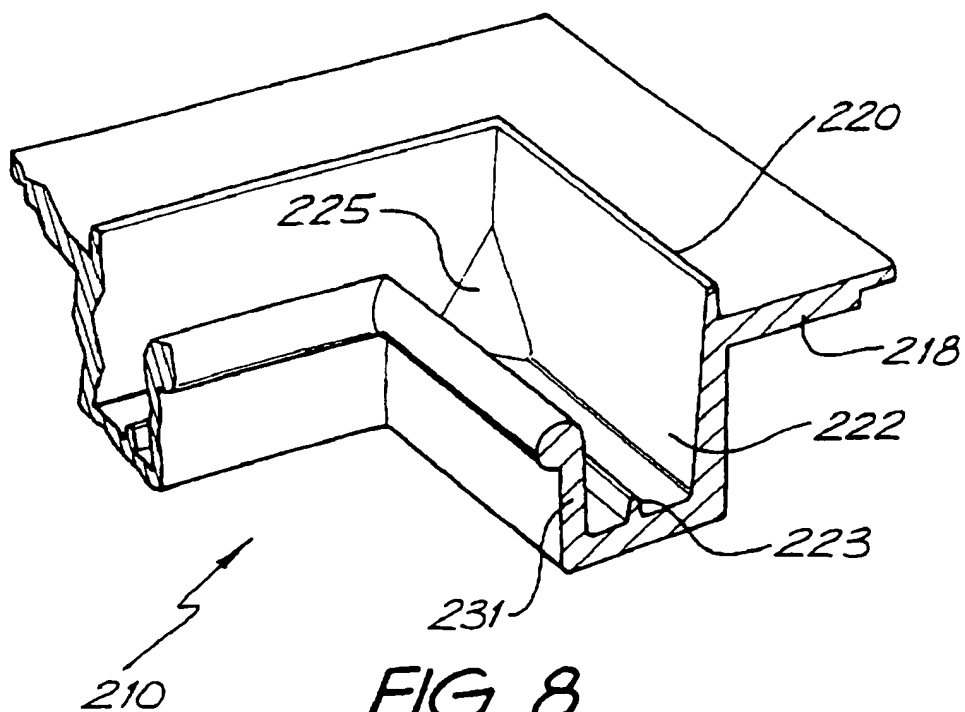


FIG. 8

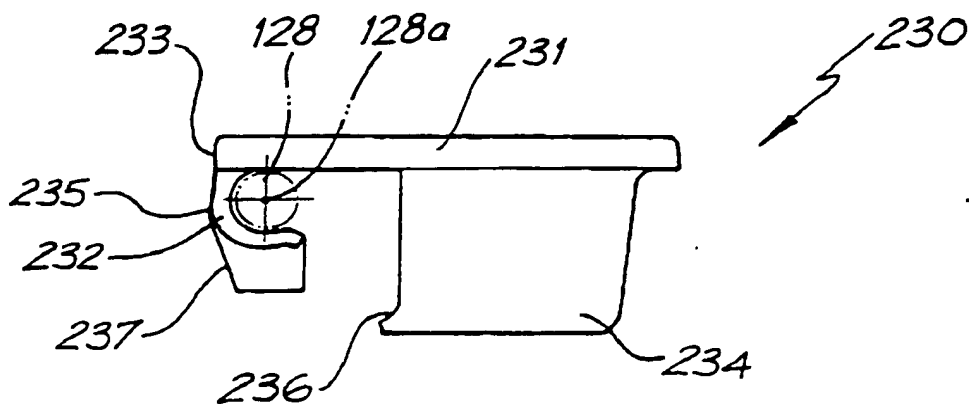


FIG. 9






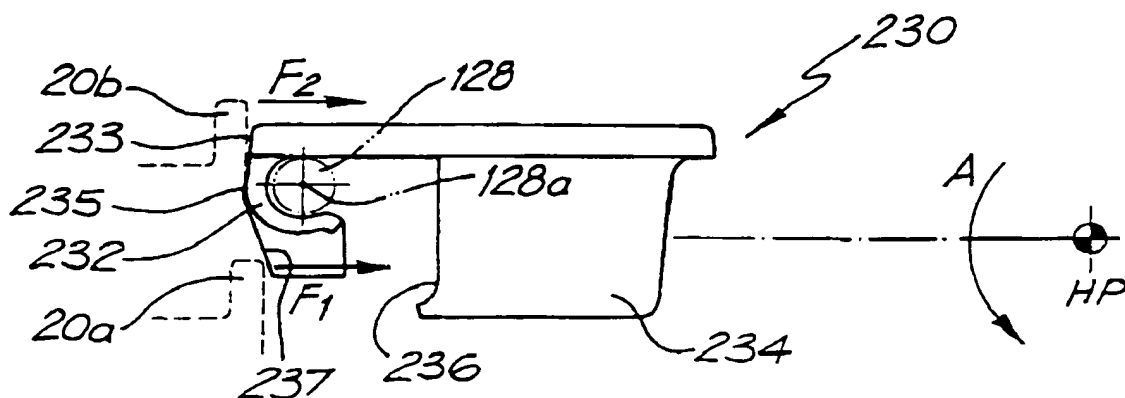


FIG. 10

Substitute Sheet  
(Rule 26) RO/AU

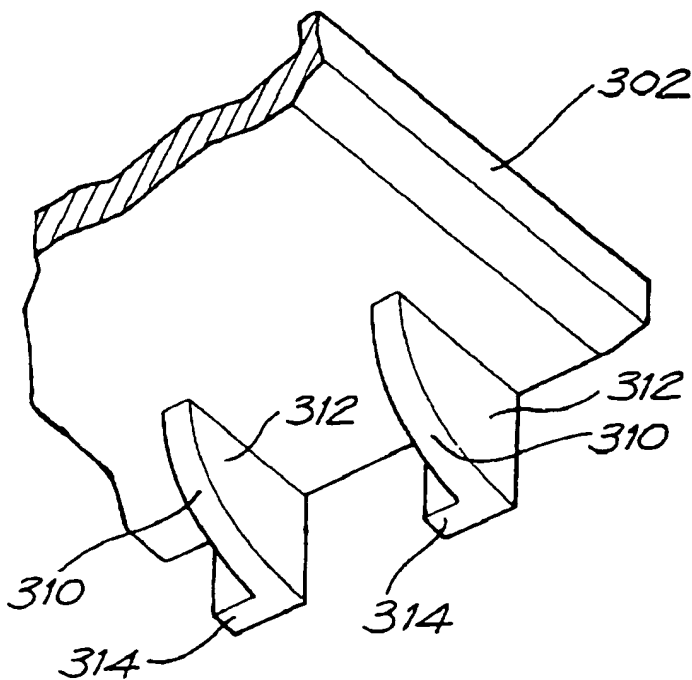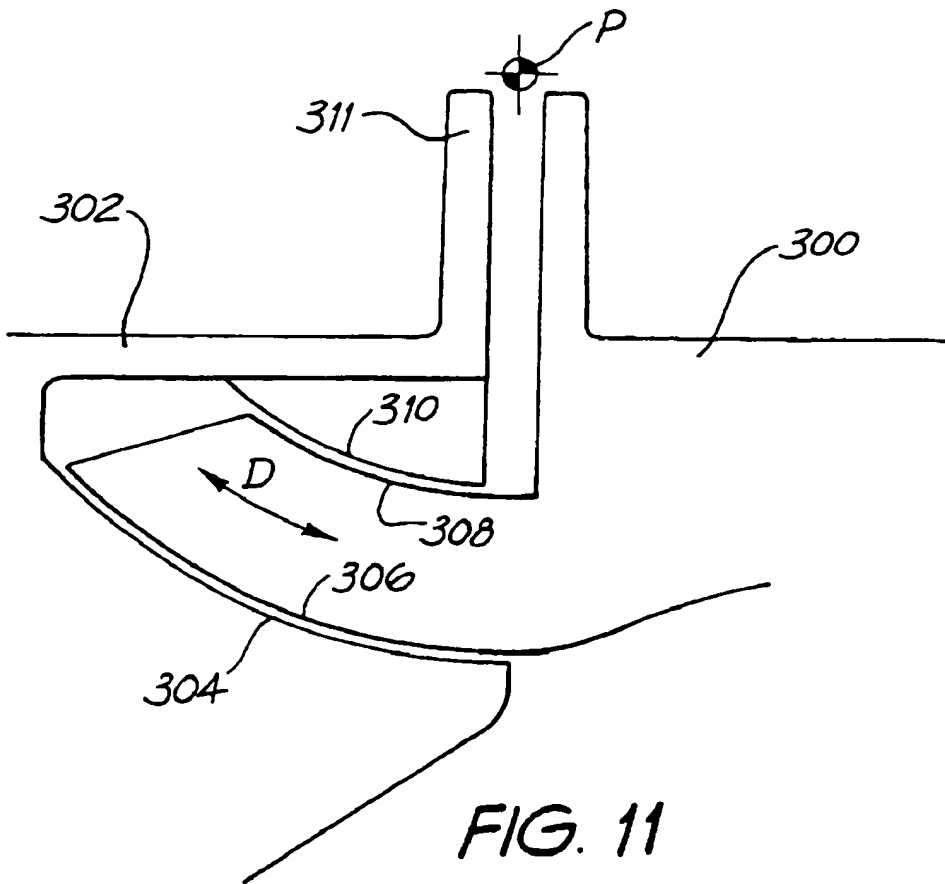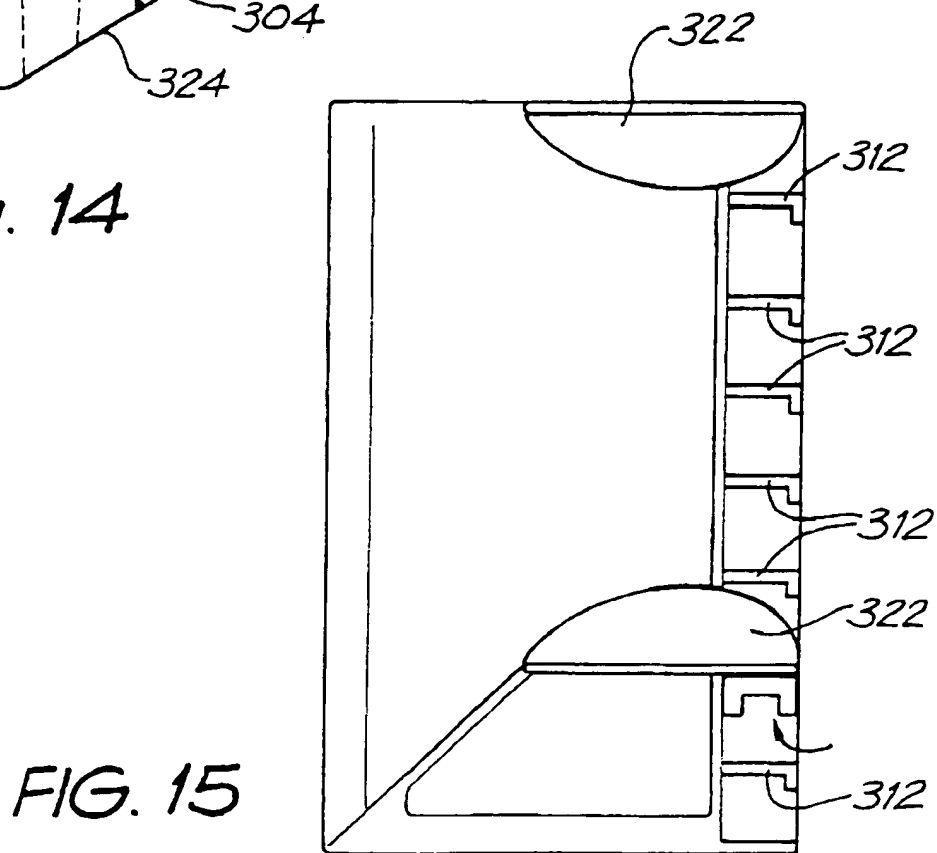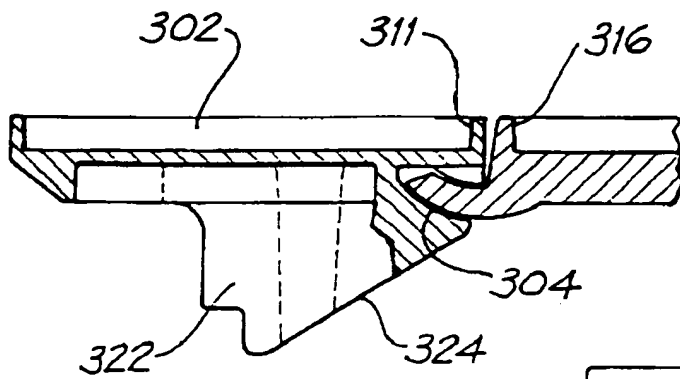

Substitute Sheet  
(Rule 26) RO/AU

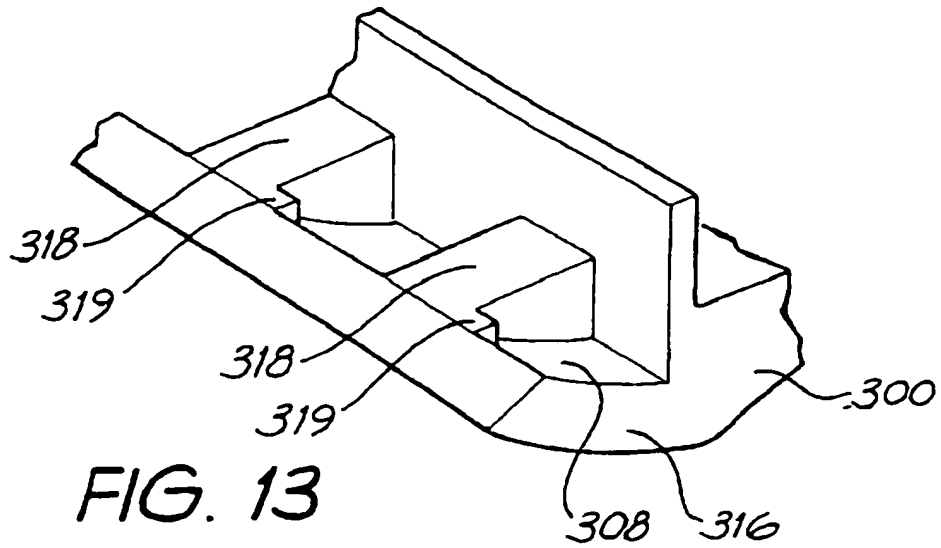

Substitute Sheet  
(Rule 26) RO/AU

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/AU00/00280**A. CLASSIFICATION OF SUBJECT MATTER**Int. Cl. <sup>7</sup>: E04F 19/08, E04B 5/08, E06B 5/01, H02G 3/08

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**Minimum documentation searched (classification system followed by classification symbols)  
E04F 19/08, 15/024, E04B 5/48, E06B 1/-, 3/-, 5/-, 7/-, H02G 3/-Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
AU: IPC as aboveElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
DERWENT + keywords**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4721476 A (Zeliff et al) 26 January 1988	1,20
X	US 5008491 A (Bowman) 16 April 1991	12
X	WO 98/34310 A1 (Albert Ackermann GmbH + Co) 6 August 1998	12

☒ Further documents are listed in the continuation of Box C ☒ See patent family annex

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search  
5 June 2000Date of mailing of the international search report  
19 JUN 2000Name and mailing address of the ISA/AU  
AUSTRALIAN PATENT OFFICE  
PO BOX 200, WODEN ACT 2606, AUSTRALIA  
E-mail address: pct@ipaustalia.gov.au  
Facsimile No. (02) 6285 3929

Authorized officer

Telephone No: (02) 6285 2113

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00280

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SE 469706B (Thorsman & Co) 23 August 1993	20,21,31,37
X	DE 4003279 A (Kleinhuis H & Co) 8 August 1991	24,31,37
X	US 4973797 A (Jorgensen et al) 27 November 1990	24,31,39
X	US 4850176 A (Munsey et al) 25 July 1989	30
X	GB 2282921 A (Davis Group Ltd) 19 April 1995	30
X	Parent Abstracts of Japan 10248146 A (Om Kiki KK) 14 September 1998	30
A	WO 93/00732 A1 (MK Electric Ltd) 7 January 1993	all

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00280

**Box I** Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos :  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos :  
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos :  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6 4(a)

**Box II** Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

( See extra sheet for details )

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims
2. ☒ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

**Remark on Protest** ☐ The additional search fees were accompanied by the applicant's protest.

☐ No protest accompanied the payment of additional search fees.

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/AU00/00280

**Supplemental Box**

(To be used when the space in any of Boxes I to VIII is not sufficient)

**Continuation of Box No: II**

The international application does not comply with the requirements of unity of invention because it does not relate to one invention or to a group of inventions so linked as to form a single general inventive concept. In coming to this conclusion the International Searching Authority has found that there are different inventions as follows:

1. Claims 1,4,5 and 12 are directed to a floor frame for an access hatch with a flange which is under the floor covering or tapered. It is considered that the thus produced low profile frame comprises a first "special technical feature".
2. Claims 20,21,22,34 and 39 are directed to a lid for an access panel with a pivoted hatch in the lid. It is considered that this comprises a second "special technical feature".
3. Claim 30 is directed to a lid and frame for an access panel with chamfered edges forming a watertight seal. It is considered that this comprises a third "special technical feature".
4. Claim 31 is directed to a frame for an access panel with an aperture and a well or trough along one side. It is considered that this comprises a fourth "special technical feature".
5. Claim 37 is directed to a lid for an access panel with a bistable latch. It is considered that this comprises a fifth "special technical feature".

Since the abovementioned groups of claims do not share any of the technical features identified, a "technical relationship" between the inventions, as defined in PCT rule 13.2 does not exist. Accordingly the international application does not relate to one invention or to a single inventive concept, a priori.

Furthermore, the claims of claim groups 1 and 2 are not so linked as to form a single general inventive concept, that is, they do not have any common inventive features, which define a contribution over the prior art. The common concept linking together these claims is a low profile access panel and an access panel with hatches in its lid respectively. However these concepts are not novel in the light of. Therefore these claims lack unity a posteriori.

INTERNATIONAL SEARCH REPORT  
Information on patent family members

International application No.  
PCT/AU00/00280

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member			
US	4721476	NONE				
US	5008491	US	4967041			
WO	9834310	AU	59879/98	CN	1216169	EP 894352
DE	4003279	EP	440972			
US	4973797	CA	2005775			
US	4850176	AU	26491/88	CA	1311103	JP 1203560
		US	5111630			
GB	2282921	NONE				
						END OF ANNEX